

Technical Reference Note

µMP Series GEN II

Artesyn

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

FORTEC Elektronik AG

Hauptniederlassung
Lechwiesenstr. 9
86899 Landsberg am Lech

Telefon: +49 (0) 8191 91172-0

Telefax: +49 (0) 8191 21770

E-Mail: sales@fortecag.de

Internet: www.fortecag.de

FORTEC Elektronik AG

Büro Nord
Am Hasenkamp 36
22457 Hamburg

Telefon: +49 (0) 40 54 80 56 11

Telefax: +49 (0) 40 54 80 56 13

E-Mail: nord@fortecag.de

Internet: www.fortecag.de

FORTEC Elektronik AG

Büro West
Hohenstaufenring 55
50674 Köln

Telefon: +49 (0) 221 272 273-0

Telefax: +49 (0) 221 272 273-10

E-Mail: west@fortecag.de

Internet: www.fortecag.de

FORTEC Elektronik AG

Büro Wien
Nuschlinggasse 12
A-1230 Wien

Telefon: +43 1 8673492-0

Telefax: +43 1 8673492-26

E-Mail: office@fortec.at

Internet: www.fortec.at

ALTRAC AG

(Tochter der FORTEC):
Bahnhofstraße 3
CH-5436 Würenlos

Telefon: +41 (0) 44 7446111

Telefax: +41 (0) 44 7446161

E-Mail: info@altrac.ch

Internet: www.altrac.ch

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

μMP Series GEN II

Up to 1800 Watts Configurable

Total Power: Up to 1800 Watts
Input Voltage: 85-264 Vac
120-300 Vdc
of Outputs: Up to 12

Special Features

- Full Medical EN60601 approval
- PMBus monitor/control of input functions
- High efficiency
- Constant current limit protection
- High power density
 - μMP04: 10.8 W / in³
 - μMP10: 15.1 W / in³
 - μMP16: 22.9 W / in³
- Low Noise Intelligent fan (speed control/fault status), 36% Reduction from GEN I
- Downloadable GUI from website
- Optional conformal coating
- Industrial temp range (-40 °C to 70 °C)
- No preload required
- Military STD Shock/Vibration (> 50G's)
- Low cost
- IEC, Terminal Block or Barrier Strip Input Connection Options
- Low profile 1U size
- Superior Aesthetics over GEN I

Safety

| | |
|---------|---|
| UL | UL60950-1/CSA22.2 No.60950-1/ ES60601-1/CSA22.2 No.60601-1 |
| TUV | EN60950-1/EN60601-1 |
| CB | Certificate and report |
| CE | LVD+RoHS |
| CQC | Approved |
| Medical | 2*MOPP |




Product Descriptions

The μMP series GEN II power supply is a configurable power supply with market-leading density and efficiency. It features a very wide 85 to 264 Vac input voltage range and employs active power factor correction to minimize input harmonic current distortion and to ensure compliance with the international EN61000-3-2 standard – they have a power factor of 0.99 typical. The power supplies also feature active AC inrush control to automatically limit inrush current at turn-on to 40 A maximum.

The μMP series GEN II can deliver up to 1800 Watts maximum from the μMP16 case. The power supply has a Low profile 1U size and has a power density of more than 22.9 Watts per cubic inch. When fed with a 180 to 264 Vac input, the μMP Series GEN II can achieve a very high – 91.5% typical efficiency at full case load.

Ordering Information



| | | |
|---|-------------------|--|
| ① | Case Type | <p>Case Size where X = 04 = 1.57" x 3.5" x 10.0", 400W - 600W, 4 Slots 10 = 1.57" x 5.0" x 10.0", 1000W-1200W, 6 Slots 16 = 1.57" x 5.0" x 10.0", 1200W-1800W**, 6 Slots ** See Input Derating table for μMP16</p> <p>Input Type where Y = T = Terminal Block C = IEC Connector C14 S = Barrier Strip</p> |
| ② | Module / Voltage | <p>Module Codes: S2 # = 200W Single O/P (1 slot) SK # = 1000W Single O/P (3 slot) I # # = 96W Dual O/P, Isolated GND (1 Slot)</p> <p># = Voltage Codes: See voltage code table</p> |
| ③ | Case Option Codes | <p>First digit 0-9 = Parallel Code</p> <p>Second Digit 0 = Forward Air 1 = Reverse Air 2 = Not Used 3 = Global Enable 5 = Opt 1 + Opt 3</p> |
| ④ | Software Code | <p>Standard = A Modified Standards = factory assigned</p> |
| ⑤ | Hardware Code | <p>Standard = none Modified Standards = factory assigned</p> |

Case Size Line-Up


| Case | Max Output Power | | Dimensions mm (inch) | Connections | Max Continuous Current |
|-----------------|------------------|------------|--|--|---------------------------|
| | 85-264Vac | 180-264Vac | | | |
| μMP04 - 4 Slots | 400W | 600W | 256.9 x 88.9 x 40.0 (10.11" x 3.5" x 1.57") | IEC Terminal-Block Barrier-Strip | 9.91A |
| μMP10 - 6 Slots | 1000W | 1200W | 256.9 x 127 x 40.0 (10.11" x 5.0" x 1.57") | IEC Terminal-Block Barrier-Strip | 13.87A |
| μMP16 - 6 Slots | 1000W | 1800W | 256.9 x 127 x 40.0 (10.11" x 5.0" x 1.57") | IEC Terminal-Block Barrier-Strip | 13.87A |

μMP16 Input Power Derating

| Paramater | 85-99Vac | 100-180Vac | 180-199Vac | 200-264Vac |
|-----------------------------|----------|------------|------------|------------|
| Designed For | 1000W | 1200W | 1600W | 1800W |
| Safety Label and Evaluation | 1000W | 1000W | 1600W | 1600W |

Case Input Type


Terminal Block (T)



IEC Connector C14 (C)



Barrier Strip (S)



Voltage Codes

| Standard Output Ratings | | | | | | | | | | |
|----------------------------|-------|----------------------|-----------------------|--------------------------|------------------------------|-----|--------------------------|-------------|-----------------|--|
| Module Output Voltage Code | | Signal Output | | | Dual Output | | | | | |
| | | One Slot 240W Max | Three Slots 1000W Max | Module Group | One Slot 96W Max each output | | Module Group | | | |
| Module Identification | | S2 # | SK # | Output Voltage Range (V) | I # # | | Output Voltage Range (V) | | | |
| Code (#) | Volts | Rated Output Current | | | Rated Output Current | | | V1 (A) | V2 (A) | |
| | | V1 (A) | V1 (A) | | | | | | | |
| A | 2.0 | 40.0 | - | 0.9 to 3.6 | 3V3 Module | NA | | NA | | |
| B | 2.2 | 40.0 | - | | | NA | | | | |
| C | 3.0 | 40.0 | - | | | NA | | | | |
| D | 3.3 | 40.0 | - | | | 4.0 | 4.0 | | | |
| E | 5.0 | 36.0 | - | 3.2 to 6.0 | 5V Module | 4.0 | 4.0 | 3.3 to 30.0 | Dual ISO Module | |
| F | 5.2 | 34.0 | - | | | 4.0 | 4.0 | | | |
| G | 5.5 | 32.0 | - | | | 4.0 | 4.0 | | | |
| H | 6.0 | 30.0 | 84.0 | | | 4.0 | 4.0 | | | |
| I | 8.0 | 25.0 | 84.0 | 6.0 to 15.0 | 12V Module | 4.0 | 4.0 | | | |
| J | 10.0 | 24.0 | 84.0 | | | 4.0 | 4.0 | | | |
| K | 11.0 | 22.0 | 84.0 | | | 4.0 | 4.0 | | | |
| L | 12.0 | 20.0 | 84.0 | | | 4.0 | 4.0 | | | |
| M | 14.0 | 17.0 | 71.4 | | | 4.0 | 4.0 | | | |
| N | 15.0 | 16.0 | 66.7 | 12.0 to 30.0 | 24V Module | 4.0 | 4.0 | | | |
| O | 18.0 | 13.0 | 42.0 | | | 4.0 | 4.0 | | | |
| P | 20.0 | 12.0 | 42.0 | | | 4.0 | 4.0 | | | |
| Q | 24.0 | 10.0 | 42.0 | | | 4.0 | 4.0 | | | |
| R | 28.0 | 8.6 | 35.7 | | | 3.4 | 3.4 | | | |
| S | 30.0 | 8.0 | 33.3 | 3.2 | 3.2 | NA | NA | | | |
| T | 33.0 | 7 | 21.0 | NA | | | | | | |
| U | 36.0 | 6.7 | 21.0 | NA | | | | | | |
| V | 42.0 | 5.7 | 21.0 | NA | | | | | | |
| W | 48.0 | 5.0 | 21.0 | NA | | | | | | |
| X | 54.0 | 4.4 | 18.5 | NA | | | | | | |
| Y | 60.0 | 4.0 | 16.7 | 33.0 to 60.0 | 48V Module | NA | | | | |
| | | | | | | NA | | | | |
| | | | | | | NA | | | | |
| | | | | | | NA | | | | |
| | | | | | | NA | | | | |
| | | | | | | NA | | | | |



* Note: For 1000W module, Output Voltages from 33.0-60.0V are available. Contact factory for availability of other output ranges

Parallel Codes (case option code - first digit)

| Parallel Codes | | | |
|----------------|-----------------------|------|-------------------|
| Code | Slots in Parallel | Code | Slots in Parallel |
| 0 | No module in parallel | 9 | 1,2,3,4,5&6 |
| 1 | 1&2 | A | 1&2; 3&4 |
| 2 | 2&3 | B | 1,2&3; 4&5 |
| 3 | 3&4 | C | 1,2,3&4; 5&6 |
| 4 | 4&5 | D | 1&2; 3&4; 5&6 |
| 5 | 5&6 | E | 1,2&3; 4,5&6 |
| 6 | 1,2&3 | H | 3,4&5 |
| 7 | 1,2,3&4 | J | 3,4,5&6 |
| 8 | 1,2,3,4&5 | K | 4,5&6 |

Air Flow Direction (case option codes - second digit)

- 0=Forward Air
- 1=Reverse Air
- 2=Not Used
- 3=Global Enable
- 5=Opt 1+ Opt 3

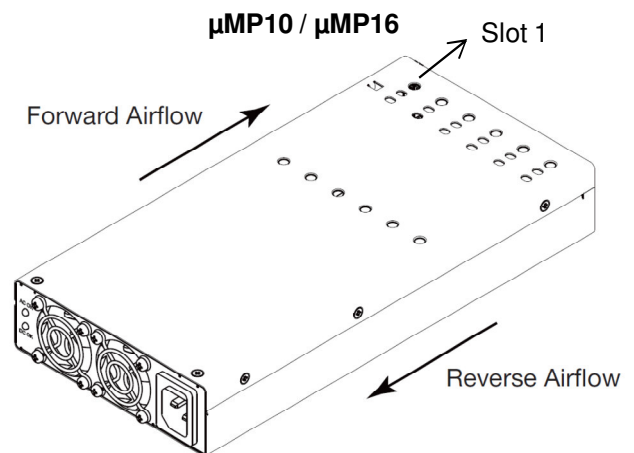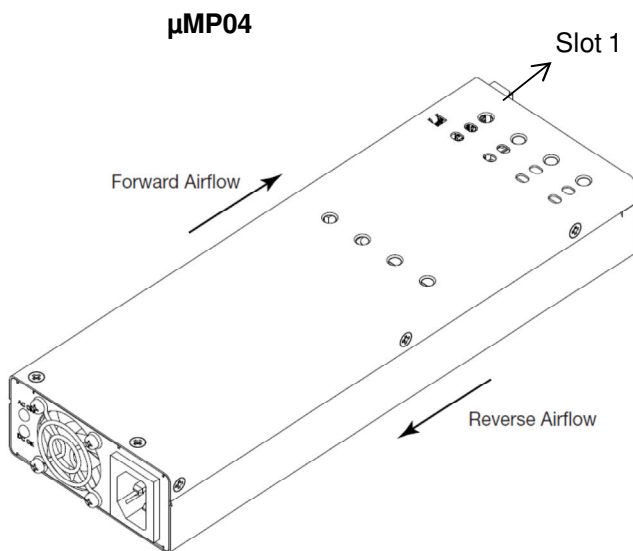

Electrical Specifications

Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

| Parameter | Model | Symbol | Min | Typ | Max | Unit |
|---|------------|-------------|------------------|-----|--------------------|------|
| Input Voltage AC continuous operation (ITE) AC continuous operation (Medical) DC continuous operation (ITE) DC continuous operation (Medical) | All models | $V_{IN,AC}$ | 85 | - | 264 | Vac |
| | | | 85 | - | 264 | Vac |
| | | | 120 | - | 350 | Vdc |
| | | | 120 | - | 300 | Vdc |
| Maximum Output Power | μMP04 | $P_{O,max}$ | - | - | 600 | W |
| | μMP10 | $P_{O,max}$ | - | - | 1200 | W |
| | μMP16 | $P_{O,max}$ | - | - | 1800 | W |
| Isolation Voltage Input to outputs Input to safety ground Outputs to outputs Outputs to safety ground | All models | - | - | - | 4000 | Vdc |
| | All models | - | - | - | 1500 | Vac |
| | All models | - | - | - | 500 | Vdc |
| | All models | - | - | - | 500 | Vdc |
| Ambient Operating Temperature Forward air Reverse air | All models | T_A | -40 ¹ | - | 70 ¹ | °C |
| | All models | T_A | -40 | - | 40 | °C |
| Storage Temperature | All models | T_{STG} | -40 | - | 85 | °C |
| Humidity (non-condensing) Operating Non-operating | All models | | 10 | - | 95 | % |
| | All models | | 10 | - | 95 | % |
| Altitude Operating Non-operating | All models | | - | - | 30000 ² | feet |
| | All models | | - | - | 30000 | feet |

Note 1 - Derate each output 2.5% per degree from 50°C to 70°C. Cold start soak -20°C, allow 10 minutes warm-up before all outputs are with in specification. Reverse air to 40°C Max due to fan derating.

Note 2 - Derate linear to 50% from 10000 - 30000 feet .

Input Specifications

Table 2. Input Specifications:

| Parameter | Conditions/Case | Symbol | Min | Typ | Max | Unit |
|--|--|--|-----------------|-------------|------------------------|------------|
| Operating Input Voltage, AC | All | $V_{IN,AC}$ | 85 | 115/230 | 264 | Vac |
| Operating Input Voltage, DC | All | $V_{IN,DC}$ | 120 | - | 350/300 | Vdc |
| Input AC Frequency | All | $f_{IN,AC}$ | 47 | 50/60 | 440 | Hz |
| Maximum Input Current ($I_O = I_{O,max}$, $I_{SB} = I_{SB,max}$) | μMP04 μMP10 μMP16 | $I_{IN,max}$ | - - - | - - - | 9.91 13.87 13.87 | A_{RMS} |
| Standby Input Current ($V_O=Off$, $I_{SB} = 0A$) | μMP04 μMP10 μMP16 | $I_{IN,standby}$ | - - - | - - - | 200 500 500 | mA_{RMS} |
| Standby Input Power ($V_O=Off$, $I_{SB} = 0A$) | μMP04 μMP10 μMP16 | $P_{IN,standby}$ | - - - | - - - | 7 13 13 | W |
| No Load Input Current ($V_O=On$, $I_O = 0A$, $I_{SB} = 0A$) | μMP04 μMP10 μMP16 | I_{IN,no_load} | - - - | - - - | 350 500 500 | mA_{RMS} |
| Harmonic Line Currents | All | THD | Per EN61000-3-2 | | | |
| Power Factor | All | | - | 0.99 | - | |
| Inrush Current | $V_{IN,AC} = 264Vac$ | | - | - | 40 | A_{PK} |
| Input Fuse | μMP04 μMP10 μMP16 | | - - - | - - - | 10 16 16 | A |
| Leakage Current to Earth Ground | $V_{IN,AC} = 240Vac$ $f_{IN,AC} = 50/60Hz$ | | - | - | 300 ¹ | μA |
| PFC Switching Frequency | All | $f_{SW,PFC}$ | 40 | - | 60 | KHz |
| Operating Efficiency @ 25°C | $I_O = I_{O,max}$ $V_{IN,AC} = 180Vac$ to 264Vac | η | - | 91.5 | - | % |
| Global Inhibit/Enable | | TTL, Logic "1" and Logic "0"; fan off when unit is inhibited | | | | |

Note 1 - Leakage current of standard uMP04 is >300uA. There is low leakage current version(<250uA) but EMI is level A.

132W - 3V3 Module Output Specifications (S2A, S2B, S2C, S2D)

Table 3. 3.3V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|-----|-------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 3.267 | 3.3 | 3.333 | Vdc | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 3.432 | - | 3.498 | Vdc | |
| Margining Down | | | 3.102 | - | 3.168 | Vdc | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 50 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 40 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | μF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | μSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

180W - 5V Module Output Specifications (S2E, S2F, S2G, S2H)

Table 4. 5V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|------|------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 4.95 | 5.00 | 5.05 | Vdc | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 5.2 | - | 5.3 | Vdc | |
| Margining Down | | | 4.7 | - | 4.8 | Vdc | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 50 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 36 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | μF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

240W - 12V Module Output Specifications (S2I, S2J, S2K, S2L, S2M, S2N)

Table 5. 12V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|-------|-------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 11.88 | 12.00 | 12.12 | Vdc | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 12.48 | - | 12.72 | Vdc | |
| Margining Down | | | 11.28 | - | 11.52 | Vdc | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 120 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 20 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | μF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

240W - 24V Module Output Specifications (S2O, S2P, S2Q, S2R, S2S)

Table 6. 24V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|-------|-------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 23.76 | 24.00 | 24.24 | V | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 24.96 | - | 25.44 | V | |
| Margining Down | | | 22.56 | - | 23.04 | V | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 240 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 10 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | μF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

240W - 48V Module Output Specifications (S2T, S2U, S2V, S2W, S2X, S2Y)

Table 7. 48V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|-------|-------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 47.52 | 48.00 | 48.48 | Vdc | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 49.92 | - | 50.88 | Vdc | |
| Margining Down | | | 45.12 | - | 46.08 | Vdc | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 480 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 5 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | μF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

1000W - 12V Module Output Specifications (SKH,SKI, SKJ, SKK, SKL, SKM, SKN)

Table 8. 12V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|-------|-------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 11.88 | 12.00 | 12.12 | Vdc | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 12.48 | - | 12.72 | Vdc | |
| Margining Down | | | 11.28 | - | 11.52 | Vdc | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 120 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 84 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | μF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

1000W - 24V Module Output Specifications (SKO, SKP, SKQ, SKR, SKS)

Table 9. 24V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|-------|-------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 23.76 | 24.00 | 24.24 | Vdc | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 12.48 | - | 12.72 | Vdc | |
| Margining Down | | | 11.28 | - | 11.52 | Vdc | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 240 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 42 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | uF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | | | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

1000W - 48V Module Output Specifications (SKT, SKU, SKV, SKW, SKX, SKY)

Table 10. 48V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit | |
|---|---|------------------------------------|------------|-------|-------|---------------------|------|
| Factory Set Point Accuracy | All | V_O | 47.52 | 48.00 | 48.48 | Vdc | |
| Output Regulation ¹ | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % | |
| Margining High | | | 49.92 | - | 50.88 | Vdc | |
| Margining Down | | | 45.12 | - | 46.08 | Vdc | |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 480 | mV _{PK-PK} | |
| Output Current | | I_O | - | - | 21 | A | |
| V_O Current Share Accuracy | 20% to 100% $I_{O,max}$ | | - | - | 5 | % $I_{O,max}$ | |
| V_O Minimum Current Share Loading | | | 20 | - | - | % $I_{O,max}$ | |
| Load Capacitance | Start up | | - | - | 2000 | uF | |
| V_O Dynamic Response | Peak Deviation | 50% load change, slew rate = 1A/μs | $\pm\%V_O$ | - | - | 5 | % |
| | Settling Time | | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % | |

Note 1 - 0.4% or 30mV which ever is greater

96W/96W - Dual ISO Module Output Specifications (I##)¹

Table 11. 3.3-28V Module Output Specifications:

| Parameter | Condition | Symbol | Min | Typ | Max | Unit |
|---|---|------------|-----|-----|------|------|
| Factory Set Point Accuracy | All | V_O | - | - | 1 | % |
| Output Regulation ² | Inclusive of line, load, temperature change and warm-up drift | $\pm\%V_O$ | - | - | 0.4 | % |
| Output Ripple, pk-pk | Measure with a 0.1μF ceramic capacitor in parallel with a 10μF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | - | 1 | % |
| Output Current | | I_O | - | - | 4 | A |
| Load Capacitance | Start up | | - | - | 2000 | μF |
| V_O Dynamic Response | | | | | | |
| Peak Deviation | 50% load change, | $\pm\%V_O$ | - | - | 5 | % |
| Settling Time | slew rate = 1A/μs | t_s | - | - | 300 | uSec |
| V_O Long Term Stability Max change over 24 hours | After thermal equilibrium (30 mins) | $\pm\%V_O$ | - | - | 0.1 | % |

Note 1 - ## see voltage codes in page 4


Note 2 - 0.4% or 30mV which ever is greater

System Timing Specifications

Table 12. System Timing Specifications:

| Label | Parameter | Min | Typ | Max | Unit |
|-------|--|------|-----|------|------|
| T1 | Delay from AC being applied to V_{SB} being within regulation | - | - | 1500 | mSec |
| T2 | Delay from AC being applied to output voltages being within regulation. | - | - | 2000 | mSec |
| T3 | V_O rise time, 10% V_O to V_O in regulation | - | - | 50 | mSec |
| T4 | Delay from output voltages within regulation limits to Global DC OK asserted high. Measured from last module going to regulation to Global DC OK assertion | - | - | 20 | mSec |
| T5 | Delay from loss of AC to de-assertion of Global DC OK | 15 | - | - | mSec |
| T6 | Delay from Global DC OK de-asserted to output voltages dropping out of regulation limits. | 1 | | | mSec |
| T7 | Hold up time - time all output voltages, including V_{SB} , stay within regulation after loss of AC. | 16.7 | - | - | mSec |
| T8 | Delay from loss of AC input to Input AC OK going to high. | - | - | 5 | mSec |
| T9 | Delay from V_{SB} being within regulation to output voltages being within regulation. | 50 | - | 2000 | mSec |

System Timing Specifications

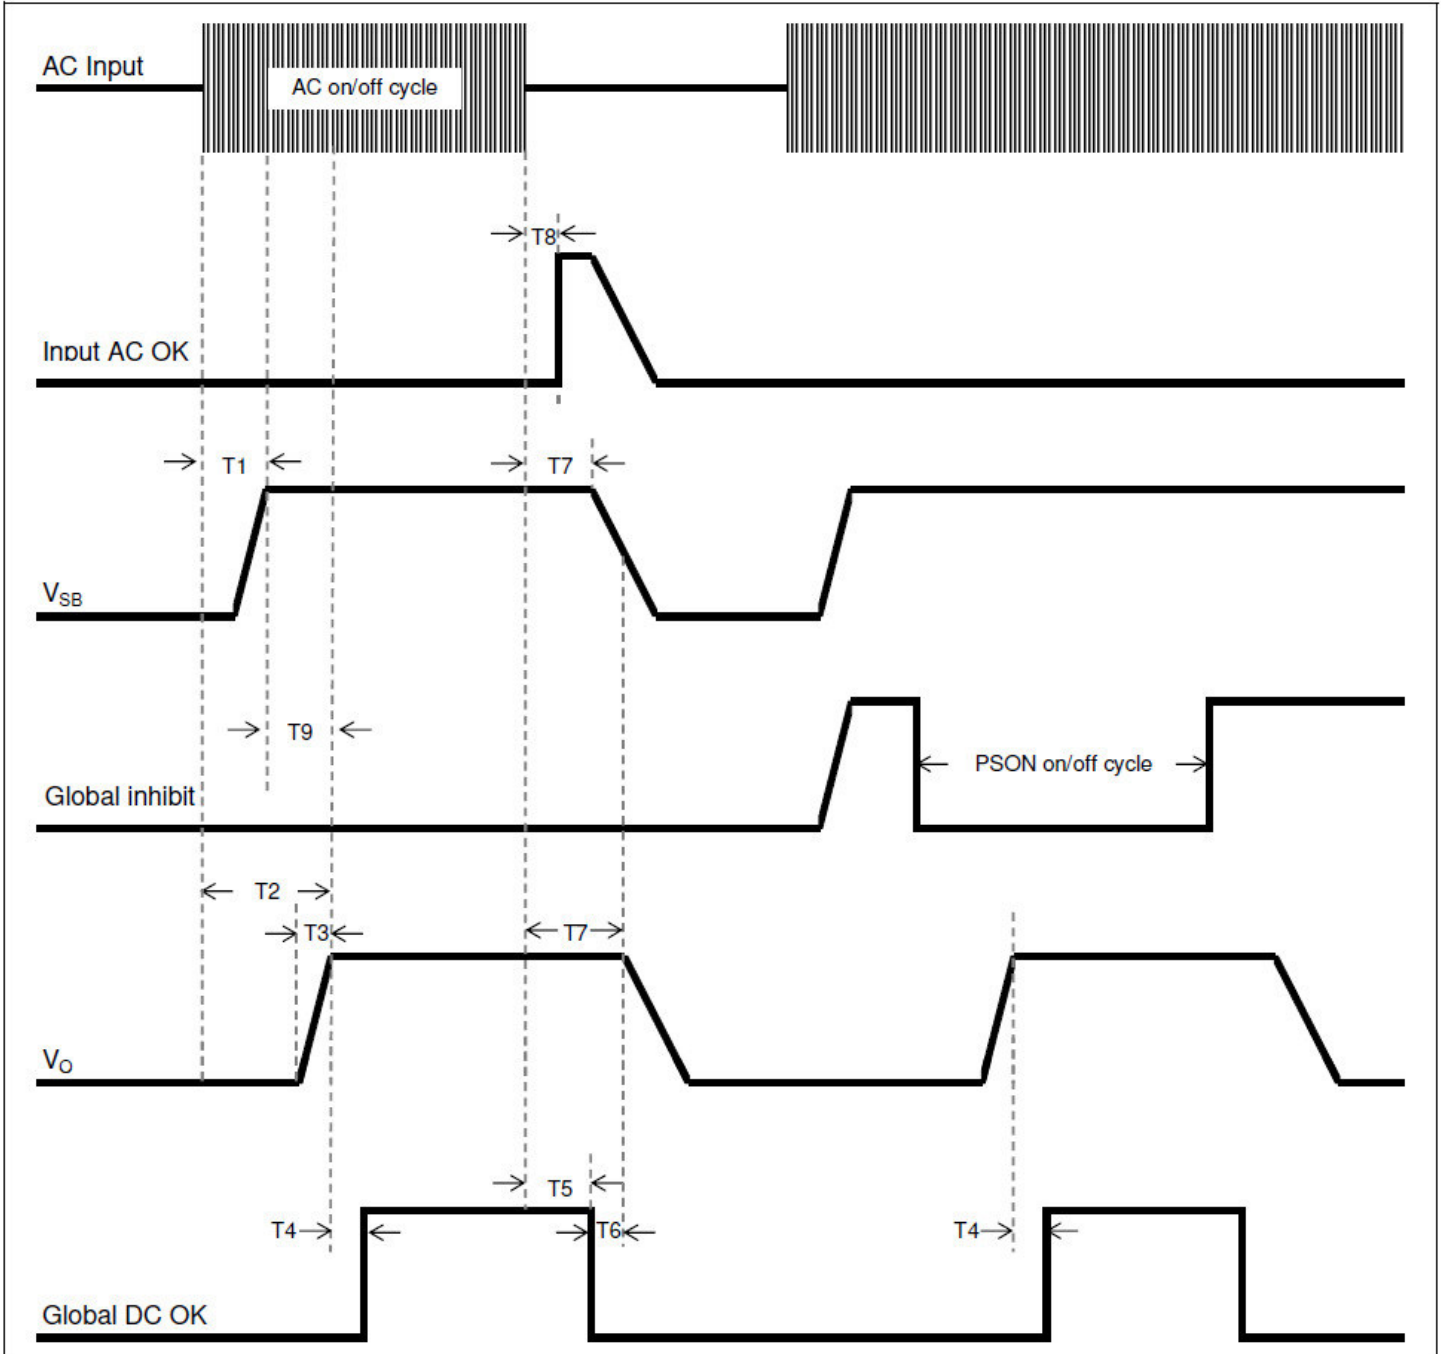

μMP04 Case Performance Curves

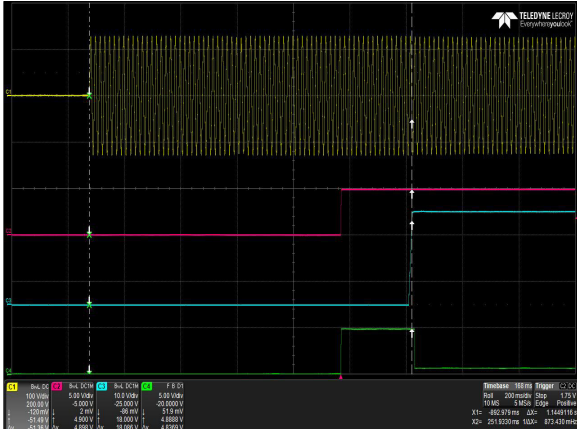


Figure 1: μMP04T-S2P-S2P-S2P-60-A Turn-on Delay via AC mains
 $V_{IN} = 90Vac$, Full Load: $I_O = 20A$, $I_{SB} = 1A$
 Ch 1: AC Mains Ch 2: V_{SB} Ch 3: V_O Ch 4: Global DC OK



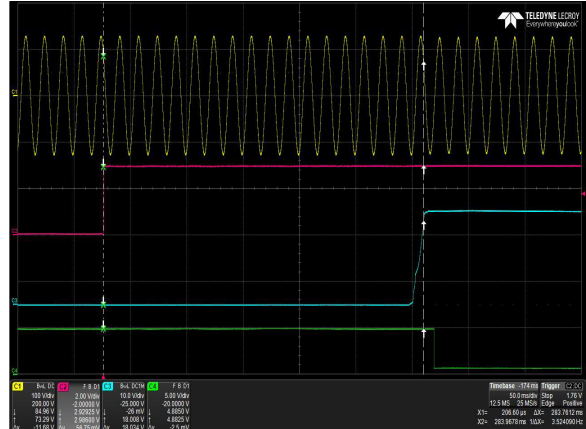


Figure 2: μMP04T-S2P-S2P-S2P-60-A Turn-on Delay via Global inhibit
 $V_{IN} = 90Vac$, Full Load: $I_O = 20A$, $I_{SB} = 1A$
 Ch 1: AC Mains Ch 2: Global inhibit Ch 3: V_O Ch 4: Global DC OK

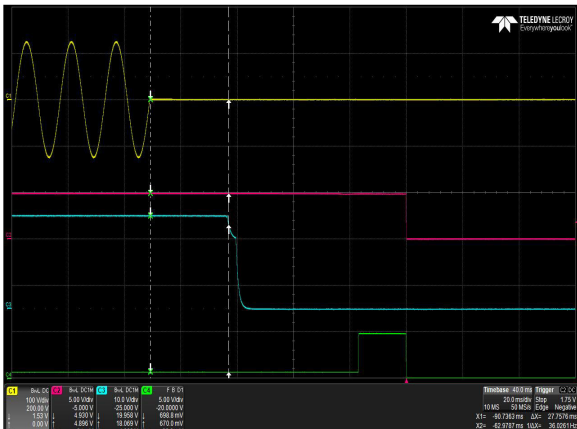

μMP04 Case Performance Curves

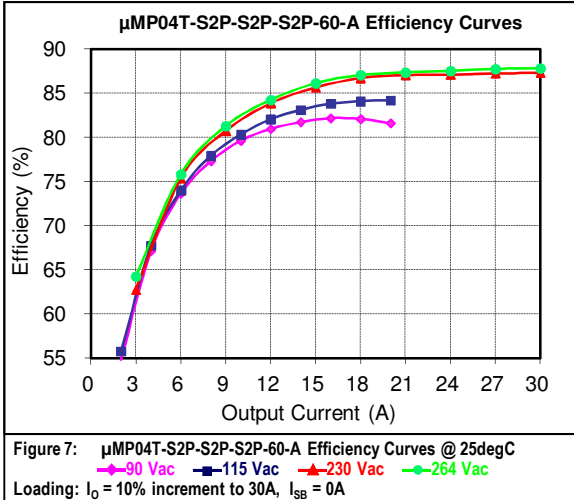

μMP10 Case Performance Curves

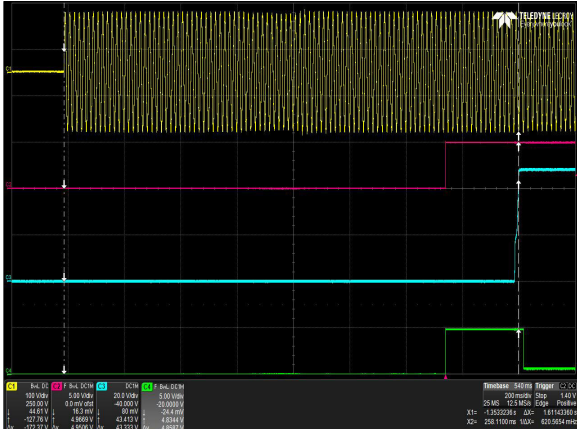


Figure 8: μMP10T-S2W-00-A Turn-on Delay via AC mains - V_{IN} = 90Vac
 Full Load: I_O = 5A, I_{SB} = 2A
 Ch 1: AC Mains Ch 2: V_{SB} Ch 3: V_O Ch 4: Global DC OK

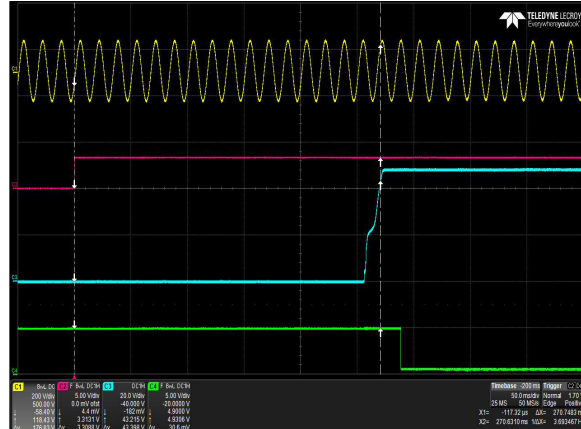


Figure 9: μMP10T-S2W-00-A Turn-on Delay via Global inhibit - V_{IN} = 90Vac
 Full Load: I_O = 5A, I_{SB} = 2A
 Ch 1: AC Mains Ch 2: Global inhibit Ch 3: V_O Ch 4: Global DC OK

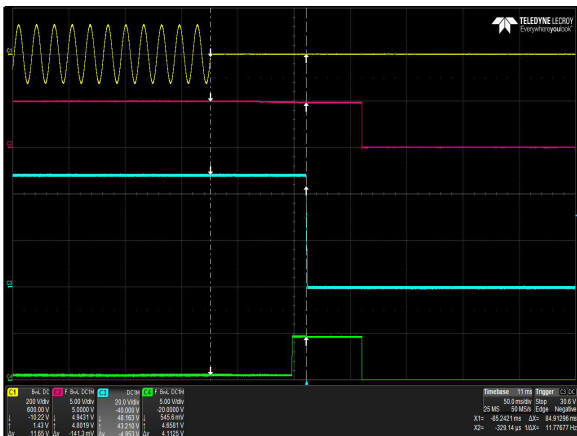


Figure 10: μMP10T-S2W-00-A Hold-up Time - V_{IN} = 90Vac / 63Hz / 0°
 Full Load: I_O = 5A, I_{SB} = 2A
 Ch 1: AC Mains Ch 2: V_{SB} Ch 3: V_O Ch 4: Global DC OK

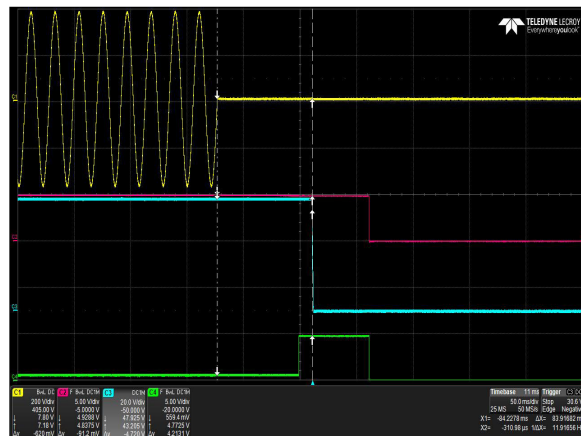


Figure 11: μMP10T-S2W-00-A Hold-up Time - V_{IN} = 264Vac / 47Hz / 0°
 Full Load: I_O = 5A, I_{SB} = 2A
 Ch 1: AC Mains Ch 2: V_{SB} Ch 3: V_O Ch 4: Global DC OK

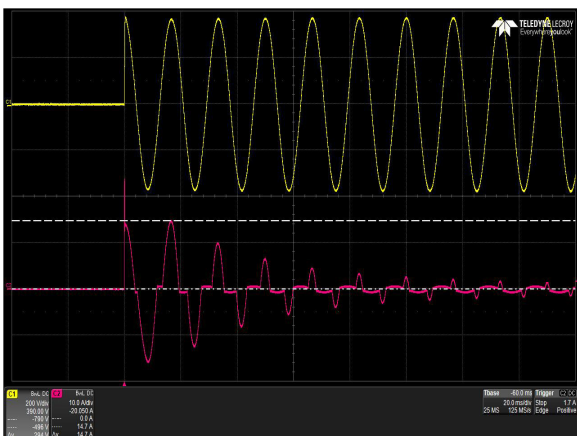


Figure 12: μMP10T-S2W-00-A Start up Inrush Current - V_{IN} = 264Vac
 Full Load: I_O = 0A, I_{SB} = 0A, Turn On Phase = 90°
 Ch 1: AC Mains Ch 2: I_{IN}


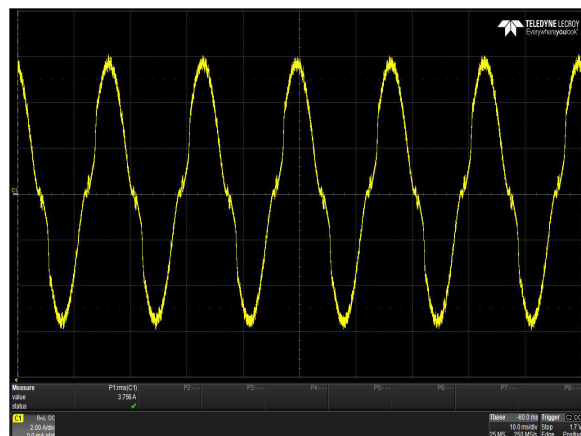


Figure 13: μMP10T-S2W-00-A Input Current Waveform - V_{IN} = 90Vac
 Full Load: I_O = 5A, I_{SB} = 2A
 Ch 1: I_{IN}

μMP10 Case Performance Curves

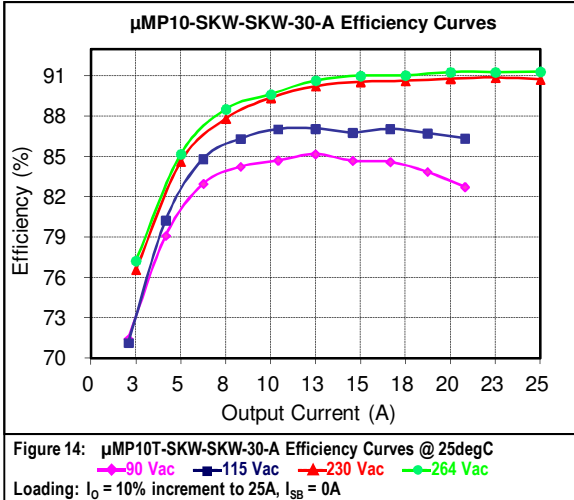

μMP16 Case Performance Curves

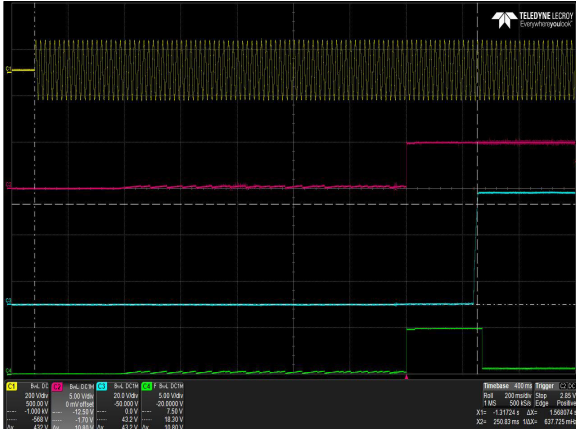


Figure 15: μMP16T-S2W-00-A Turn-on Delay via AC mains - $V_{IN} = 90Vac$
 Full Load: $I_O = 5A$, $I_{SB} = 2A$
 Ch 1: AC Mains Ch 2: V_{SB} Ch 3: V_O Ch 4: Global DC OK

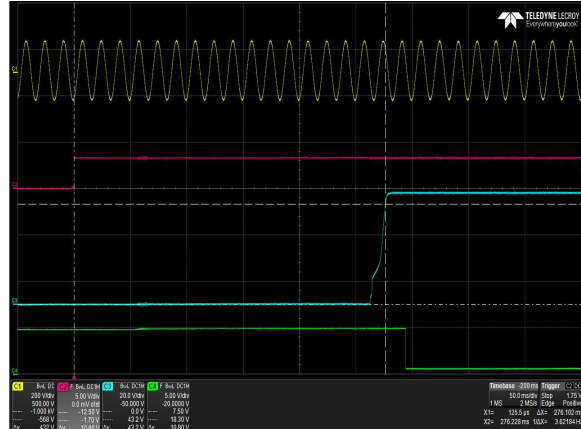


Figure 16: μMP16T-S2W-00-A Turn-on Delay via Global inhibit - $V_{IN} = 90Vac$
 Full Load: $I_O = 5A$, $I_{SB} = 2A$
 Ch 1: AC Mains Ch 2: Global inhibit Ch 3: V_O Ch 4: Global DC OK

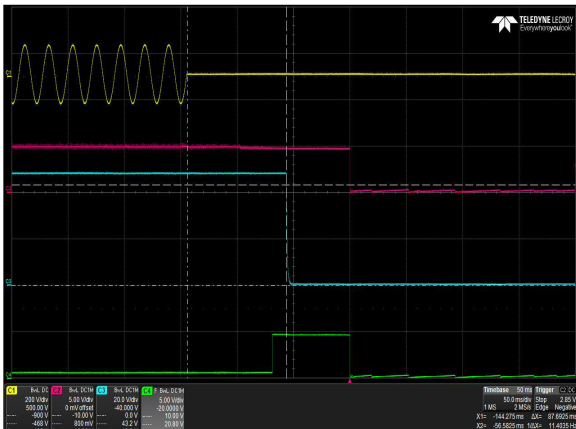


Figure 17: μMP16T-S2W-00-A Hold-up Time - $V_{IN} = 90Vac / 63Hz / 0^\circ$
 Full Load: $I_O = 5A$, $I_{SB} = 2A$
 Ch 1: AC Mains Ch 2: V_{SB} Ch 3: V_O Ch 4: Global DC OK

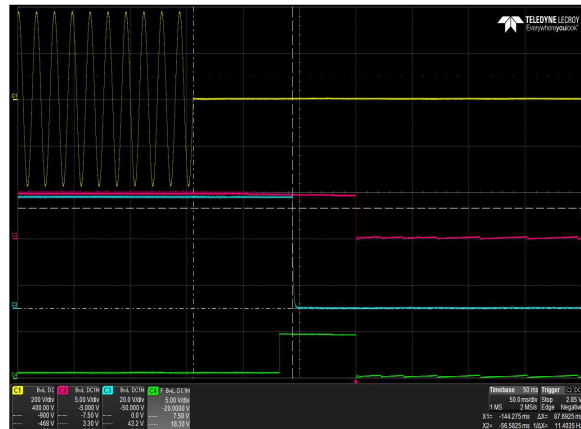


Figure 18: μMP16T-S2W-00-A Hold-up time - $V_{IN} = 264Vac / 47Hz / 0^\circ$
 Full Load: $I_O = 5A$, $I_{SB} = 2A$
 Ch 1: AC Mains Ch 2: V_{SB} Ch 3: V_O Ch 4: Global DC OK

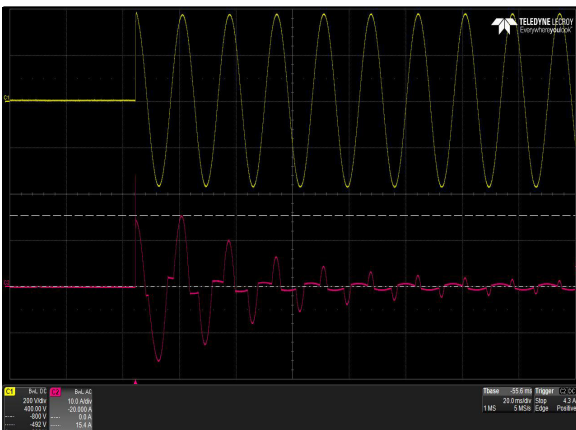


Figure 19: μMP16T-S2W-00-A Start up Inrush Current - $V_{in} = 264Vac$
 Full Load: $I_O = 5A$, $I_{SB} = 2A$, Turn On Phase = 90°
 Ch 1: AC Mains Ch 2: I_{IN}


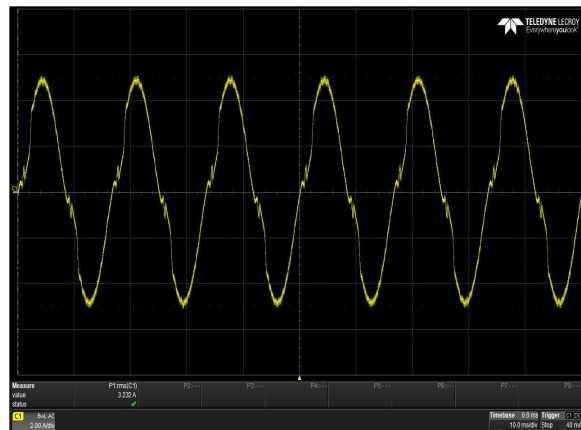


Figure 20: μMP16T-S2W-00-A Input Current Waveform - $V_{IN} = 90Vac$
 Full Load: $I_O = 5A$, $I_{SB} = 2A$
 Ch 1: I_{IN}

μMP16 Case Performance Curves

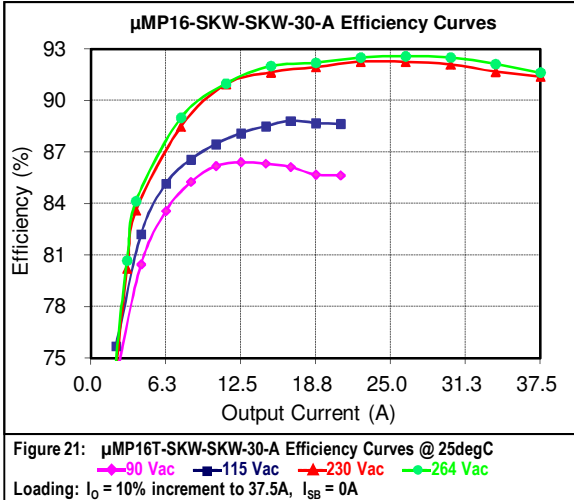

240W 12V Module Performance Curves

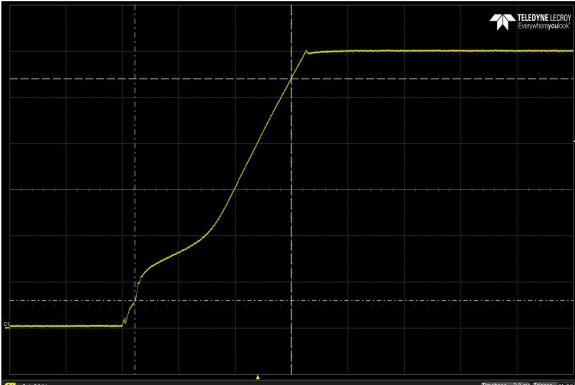


Figure 22: μMP16T-S2L-00- A Output Voltage Startup Characteristic
 Load: $I_o = 20A$
 Ch 1: V_o

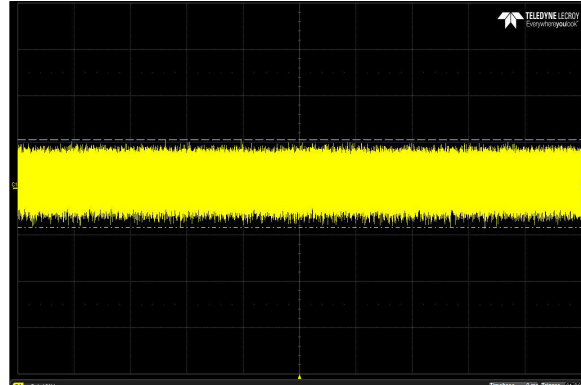


Figure 23: μMP16T-S2L-00- A Ripple and Noise Measurement
 Load: $I_o = 20A$
 Ch 1: V_o

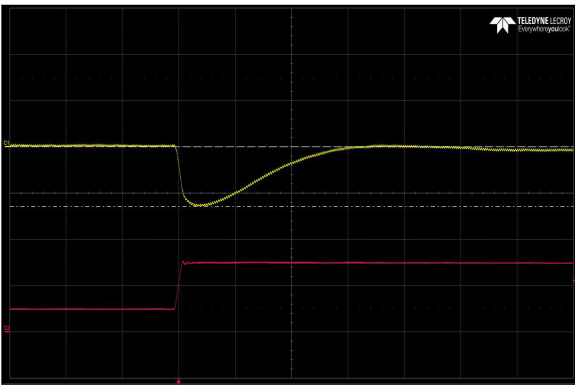


Figure 24: μMP16T-S2L-00-A Transient Response – V_o Deviation
 25% to 75% load change, 1A/ μS slew rate
 Ch 1: V_o Ch 2: I_o

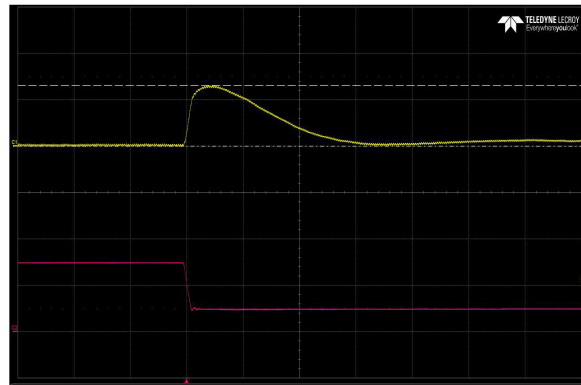


Figure 25: μMP16T-S2L-00-A Transient Response – V_o Deviation
 75% to 25% load change, 1A/ μS slew rate
 Ch 1: V_o Ch 2: I_o

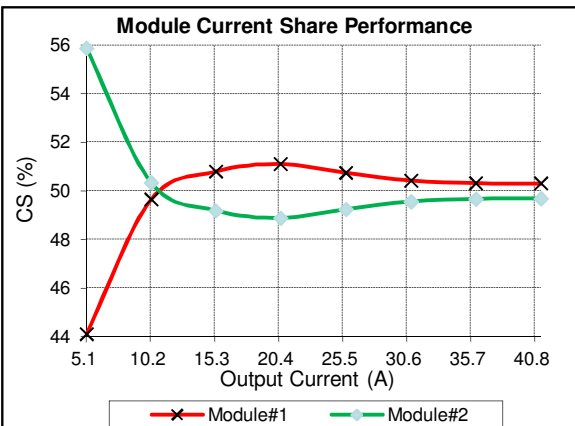


Figure 26: μMP16T-S2L-S2L-10-A Current Share Performance

96W Dual ISO Module Performance Curves

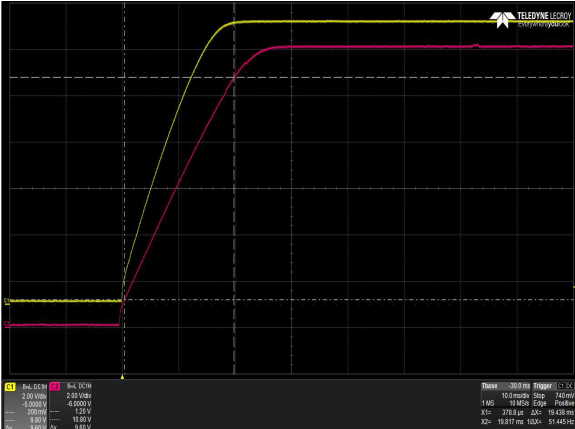


Figure 32: μMP16T-ILL-00-A Output Voltage Startup Characteristic
 Load: $I_{O1} = 4A$, $I_{O2} = 4A$
 Ch 1: V_{O1} Ch 2: V_{O2}

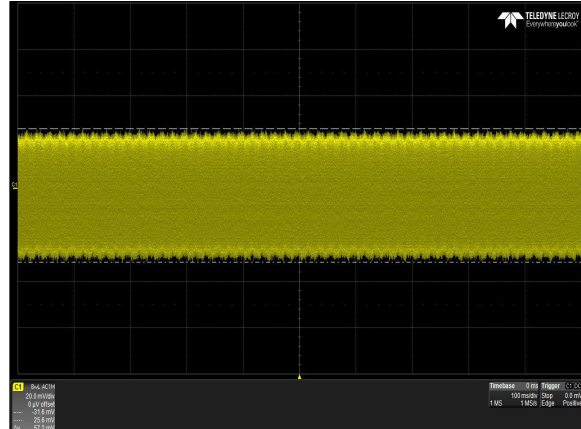


Figure 33: μMP16T-ILL-00-A Ripple and Noise Measurement
 Load: $I_{O1} = 4A$
 Ch 1: V_{O1}

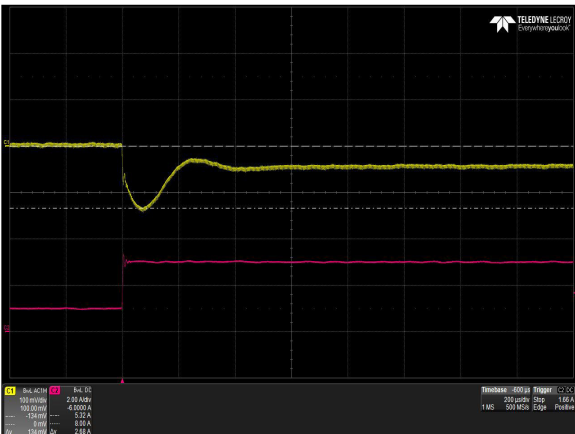


Figure 34: μMP16T-ILL-00-A Transient Response – Vo Deviation
 25% to 75% load change, 1A/ μS slew rate, $C_o = 470\mu F$
 Ch 1: V_{O1} Ch 2: I_{O1}

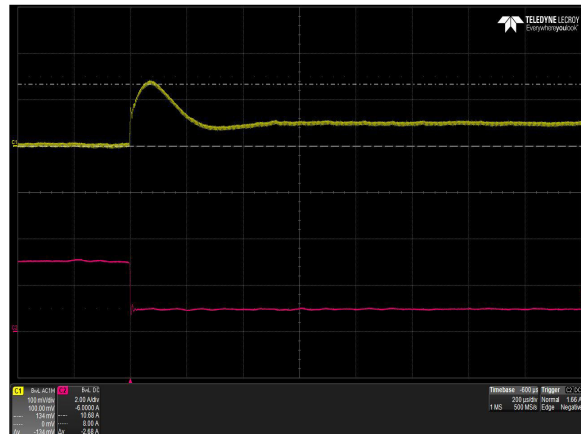


Figure 35: μMP16T-ILL-00-A Transient Response – Vo Deviation
 75% to 25% load change, 1A/ μS slew rate, $C_o = 470\mu F$
 Ch 1: V_{O1} Ch 2: I_{O1}

Protection Function Specification

Input Fusing

μMP Series is equipped with an internal non user serviceable 16A (TLAG) 250 Vac fuse for μMP10/μMP16, 10A (TLAG) 250V for μMP04 for fault protection in both the L1 and L2 lines input.

Over Voltage Protection (OVP)

The power supply latches off during output overvoltage with the AC line recycled to reset the latch.

OVP

| Parameter | Min | Nom | Max | Unit |
|--------------------------|-----|-----|-------|------|
| 3.3 V Module | | | | |
| 0.9 V Output Overvoltage | - | - | 2.00 | V |
| 3.3 V Output Overvoltage | - | - | 5.96 | V |
| 3.6 V Output Overvoltage | - | - | 6.31 | V |
| 5 V Module | | | | |
| 3.2 V Output Overvoltage | - | - | 5.76 | V |
| 5 V Output Overvoltage | - | - | 9.00 | V |
| 6 V Output Overvoltage | - | - | 10.80 | V |
| 12 V Module | | | | |
| 6 V Output Overvoltage | - | - | 10.80 | V |
| 12 V Output Overvoltage | - | - | 15.60 | V |
| 15 V Output Overvoltage | - | - | 19.50 | V |
| 24 V Module | | | | |
| 12 V Output Overvoltage | - | - | 15.60 | V |
| 24 V Output Overvoltage | - | - | 31.20 | V |
| 30 V Output Overvoltage | - | - | 39.00 | V |
| 48 V Module | | | | |
| 28 V Output Overvoltage | - | - | 36.40 | V |
| 48 V Output Overvoltage | - | - | 62.40 | V |
| 60 V Output Overvoltage | - | - | 78.00 | V |

Over Current Protection (OCP)

μMP series includes internal current limit circuitry to prevent damage in the event of overload or short circuit. Recovery is automatic when the overload is removed, it is constant current type.

| Parameter | Min | Nom | Max | Unit |
|---------------------------|-----|-----|-----|------|
| 3.3 V Module | | | | |
| 0.9 V Output Over Current | 105 | 130 | 160 | % |
| 3.3 V Output Over Current | 105 | 130 | 160 | % |
| 3.6 V Output Over Current | 105 | 130 | 160 | % |
| 5 V Module | | | | |
| 3.2 V Output Over Current | 105 | 130 | 160 | % |
| 5 V Output Over Current | 105 | 130 | 160 | % |
| 6 V Output Over Current | 105 | 130 | 160 | % |
| 12 V Module | | | | |
| 6 V Output Over Current | 105 | 130 | 160 | % |
| 12 V Output Over Current | 105 | 130 | 160 | % |
| 15 V Output Over Current | 105 | 130 | 160 | % |
| 24 V Module | | | | |
| 12 V Output Over Current | 105 | 130 | 160 | % |
| 24 V Output Over Current | 105 | 130 | 160 | % |
| 30 V Output Over Current | 105 | 130 | 160 | % |
| 48 V Module | | | | |
| 28 V Output Over Current | 105 | 130 | 200 | % |
| 48 V Output Over Current | 105 | 130 | 160 | % |
| 60 V Output Over Current | 105 | 130 | 200 | % |

Short Circuit Protection (SCP)

The μMP series power supply will withstand a continuous short circuit with no permanent damage, applied to its main output during start-up or while running.

Over Temperature Protection (OTP)

The μMP series power supply is internally protected against over temperature conditions. When over temperature circuit is activated, the power supply output will disable. Recovery type will be auto-recovery with temperature hysteresis.


Mechanical Specifications

μMP Series Mechanical Outlines

μMP04 (400/600 Watts Max)

Case Size: μMP04: 10.11" x 3.5" x 1.57" (256.9 mm x 88.9 mm x 40.0 mm)

Weight: μMP04 Case: 1.96 lbs(731.55g)

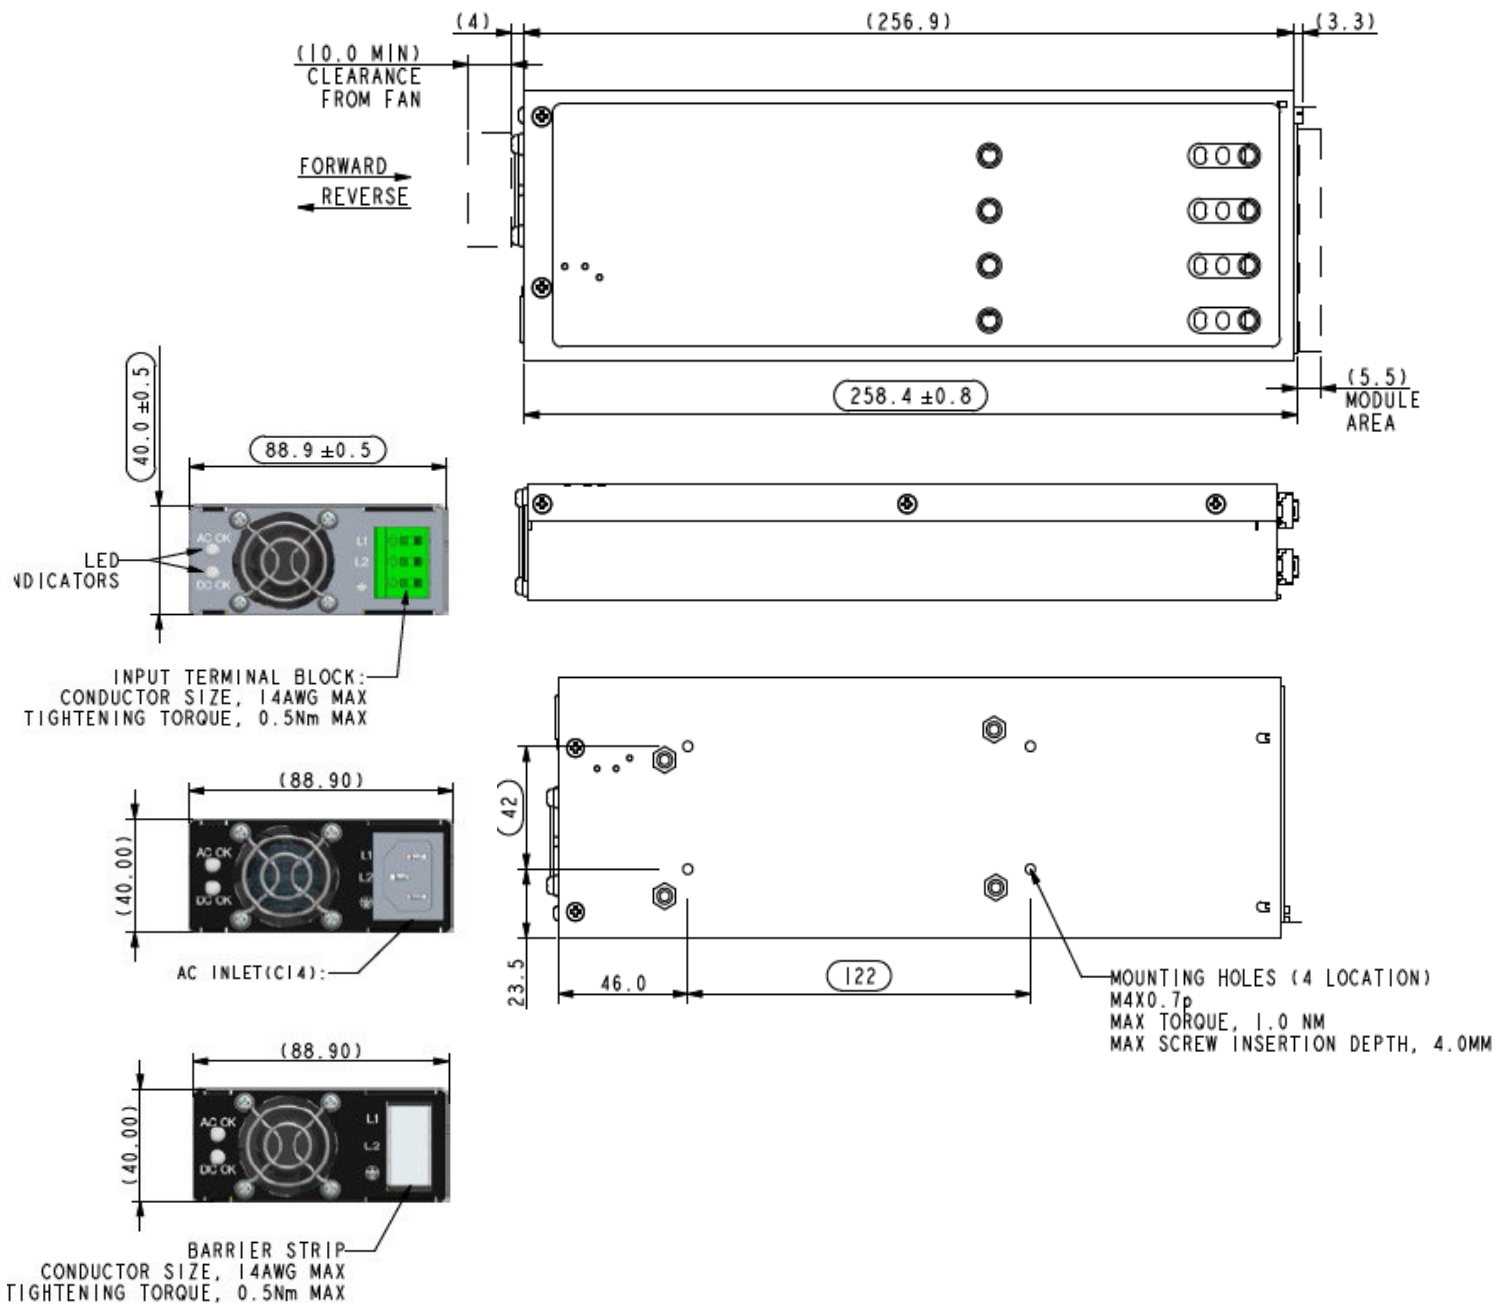

μMP Series Mechanical Outlines

Case Input Types:



SCALE 1:2
"T-VERSION"




SCALE 1:2
"S-VERSION"



SCALE 1:2
"C-VERSION"

Module Slot Location:

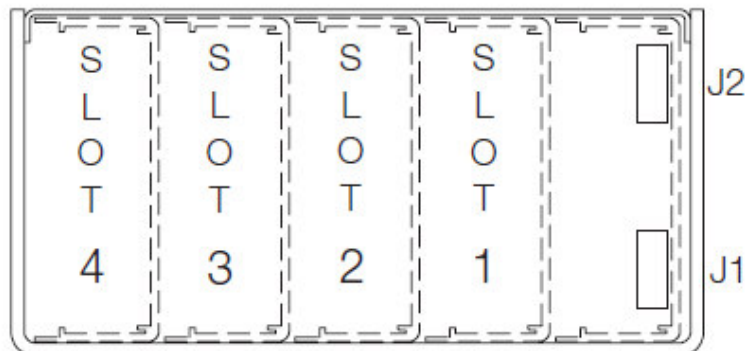



μMP Series Mechanical Outlines

μMP10 (1000/1200 Watts Max)

μMP16 (1200/1800 Watts Max)

Case Size: μMP10/16: 10.11" x 5" x 1.57" (256.9 mm x 127 mm x 40.0 mm)

Weight: μMP10/16 Case: 2.78 lbs (1037.6g)

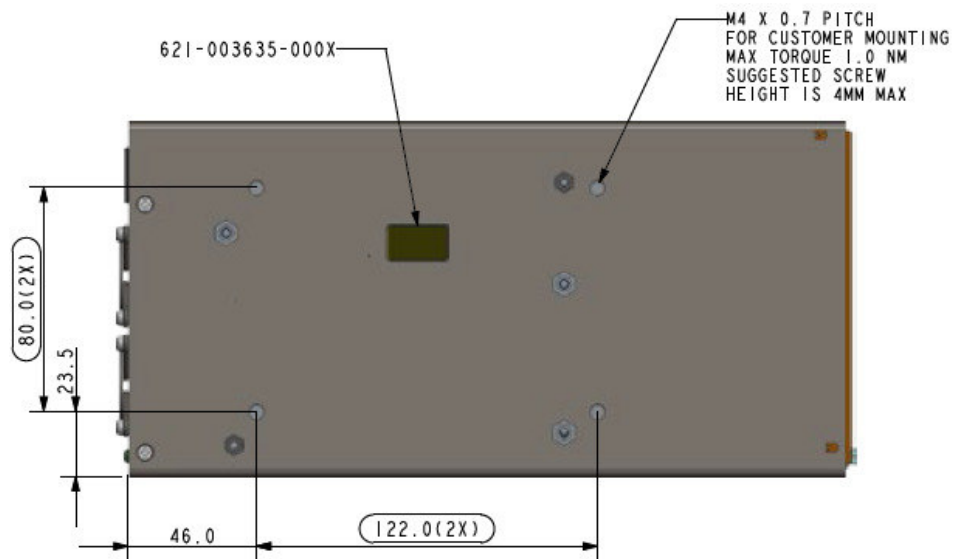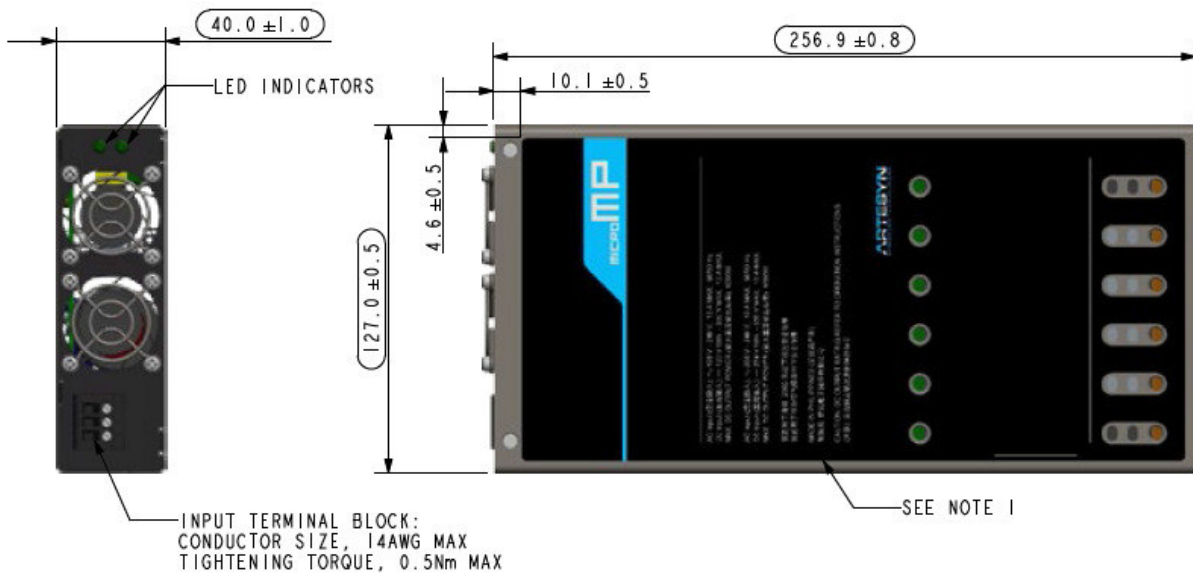


μMP Series Mechanical Outlines

Case Input Types:





Module Slot Location:

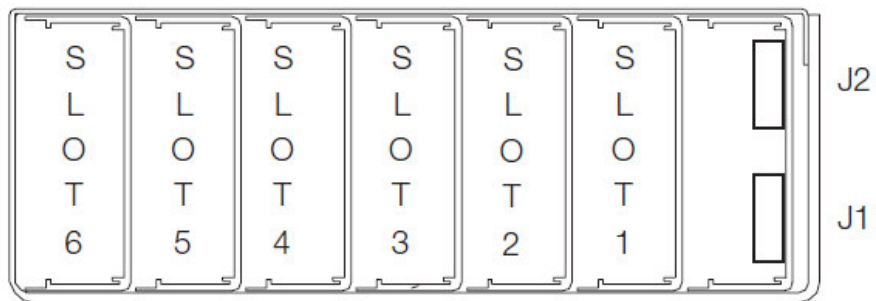

S2 Module Mechanical Outlines




Weight: 200W Single O/P: 0.221lb (82.1g)

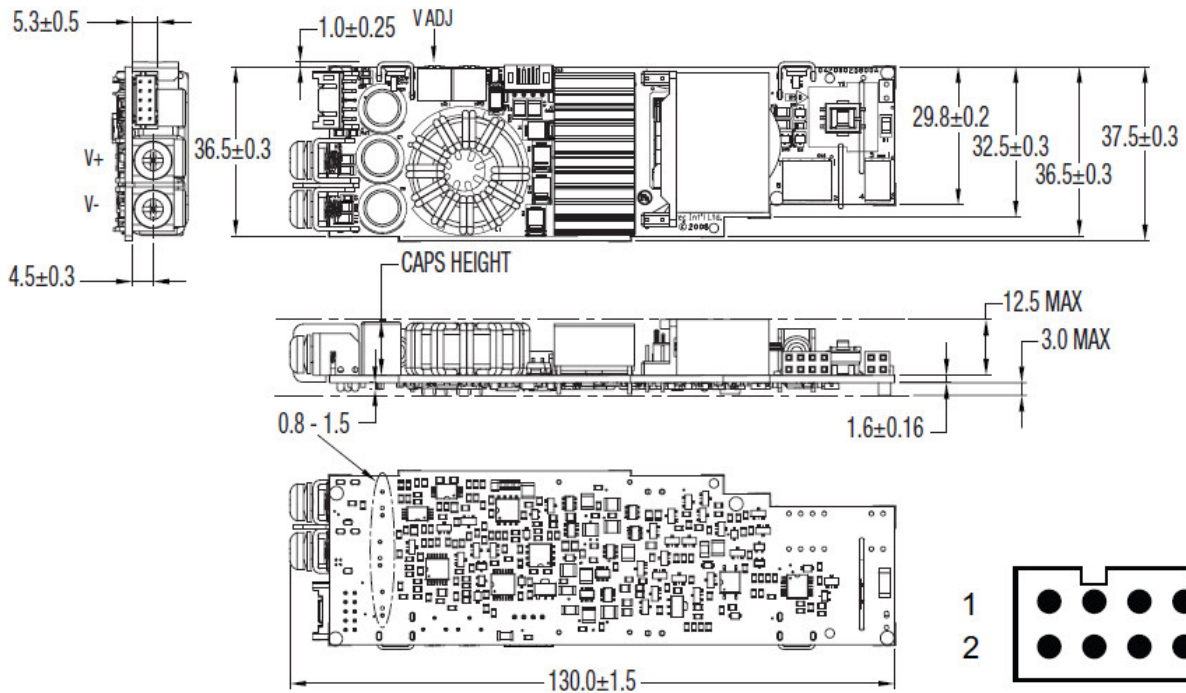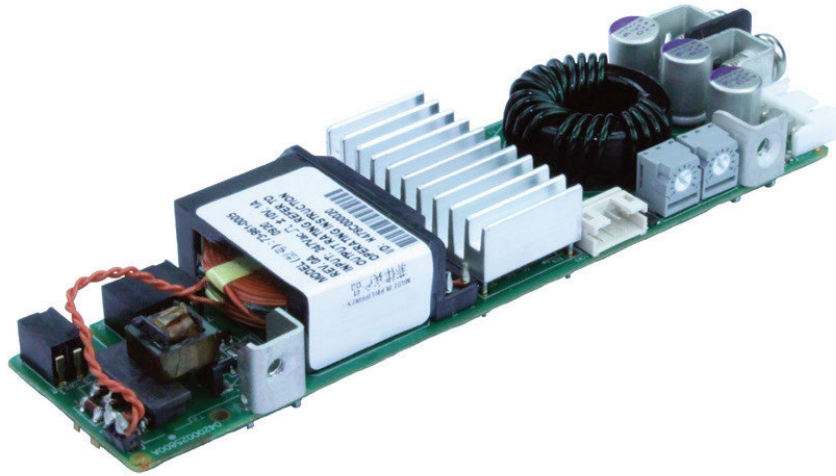

SK Module Mechanical Outlines



Weight: 1000W Single O/P: 1.34lb (340.1g)

1000 W

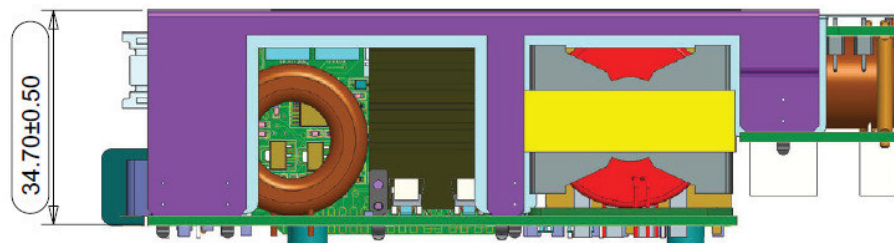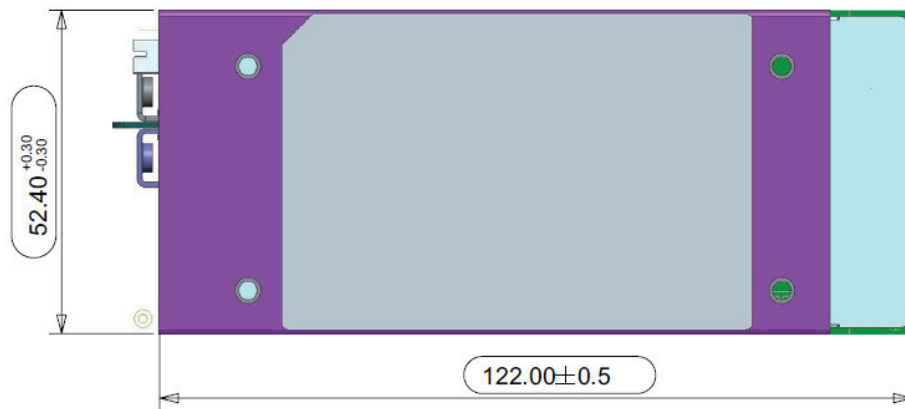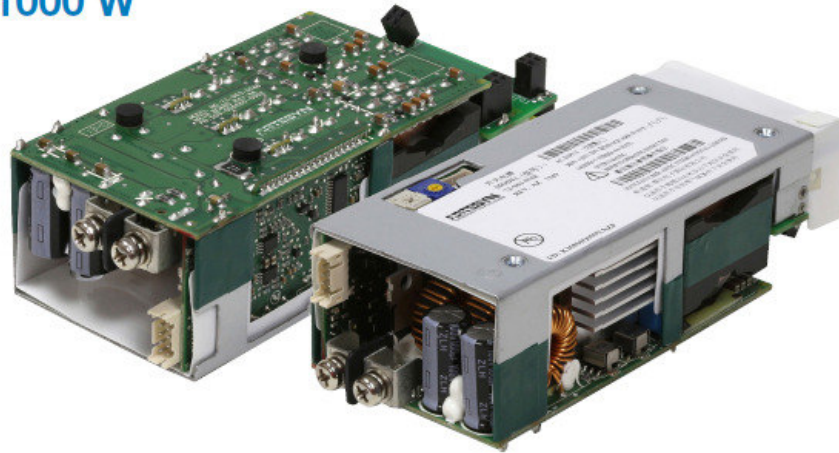

Dual Module Mechanical Outlines


Weight: Dual O/P:0.16lb (59.7g)

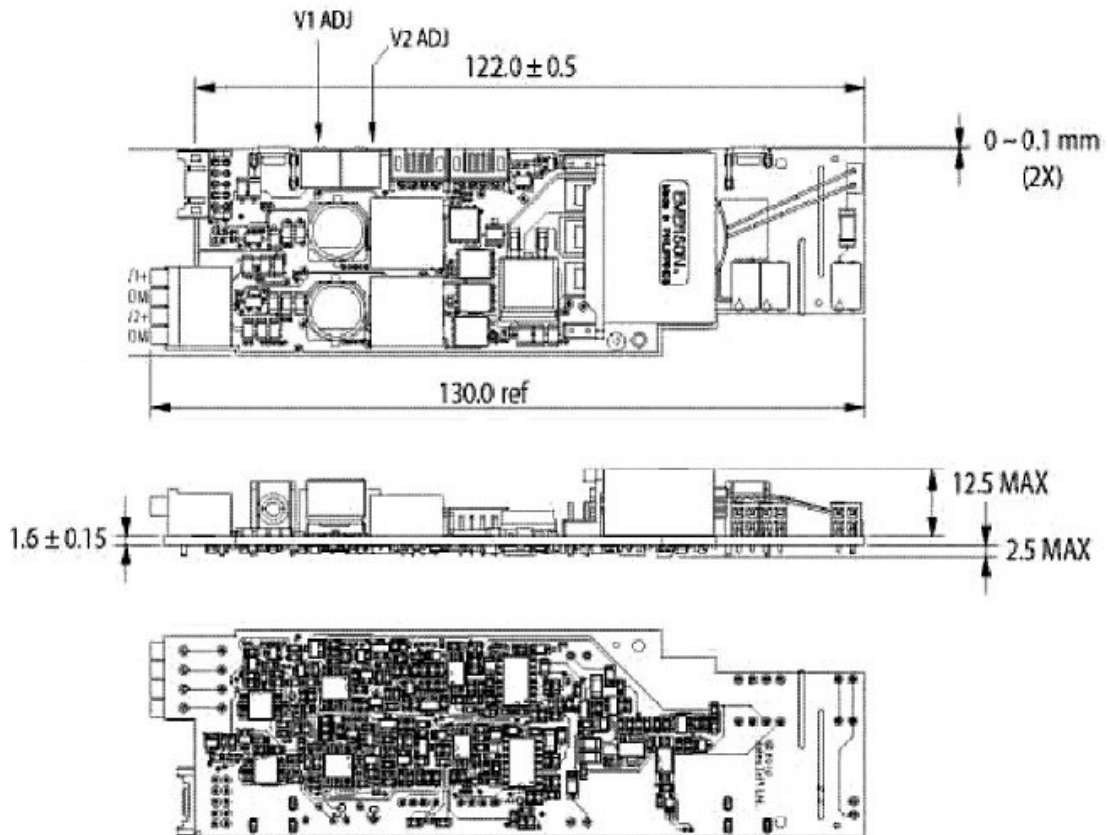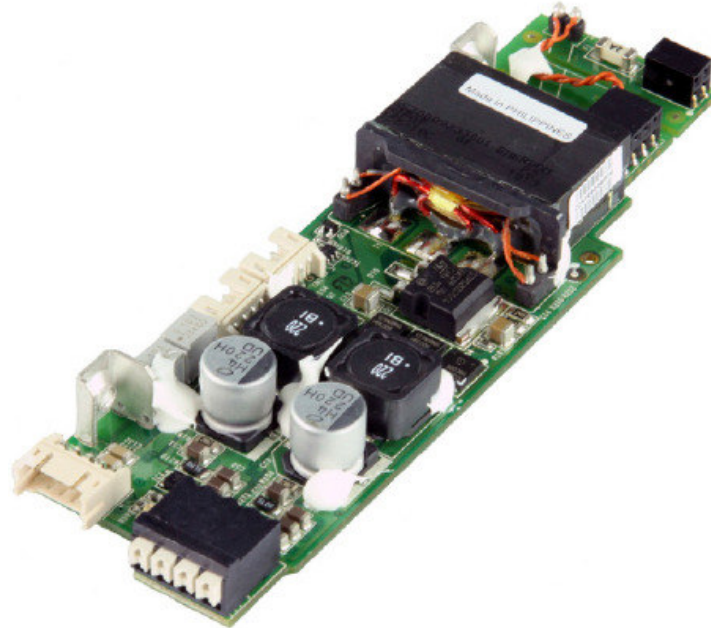


Connector Definitions - Case

AC Input Connector


- Pin 1 – AC Neutral
- Pin 2 – AC Line(hot)
- Pin 3 – Chassis(earth) ground

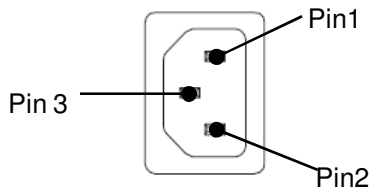

IEC Connector




Terminal Block



Barrier Strip

Case Control Signal Connector - J1

- Pin 1 – Input AC OK - “emitter”
- Pin 2 – Input AC OK - “collector”
- Pin 3 – Global DC OK - “emitter”
- Pin 4 – Global DC OK - “collector”
- Pin 5 – Spare
- Pin 6 – Global inhibit/optional enable logic “1”
- Pin 7 – Global inhibit/optional enable logic “0”
- Pin 8 – Global inhibit/optional enable return
- Pin 9 – +5VSB housekeeping
- Pin 10 – +5VSB housekeeping return



Case I2C Bus Signal Connector- J2

- Pin 1 – 5Vcc bus
- Pin 2 – Serial data signal (SDA)
- Pin 3 – Secondary return (COM)
- Pin 4 – Serial clock signal (SCL)
- Pin 5 – Address bit 2 (A2)
- Pin 6 – No connection
- Pin 7 – Address bit 1 (A1)
- Pin 8 – No connection
- Pin 9 – Address bit 0 (A0)
- Pin 10 – No connection




Connector Definitions - S2# & SK# Module

Main Output Terminals

- V+ - Positive Output
- V- - Negative Output

DC Output Control Signal Connector

- Pin 1 - No connection
- Pin 2 - No connection
- Pin 3 - Current share
- Pin 4 - Module inhibit return
- Pin 5 - Module ISO inhibit
- Pin 6 - SCOM
- Pin 7 - -RMT sense
- Pin 8 - Margin
- Pin 9 - Remote margin / V prog.
- Pin 10 - +RMT sense

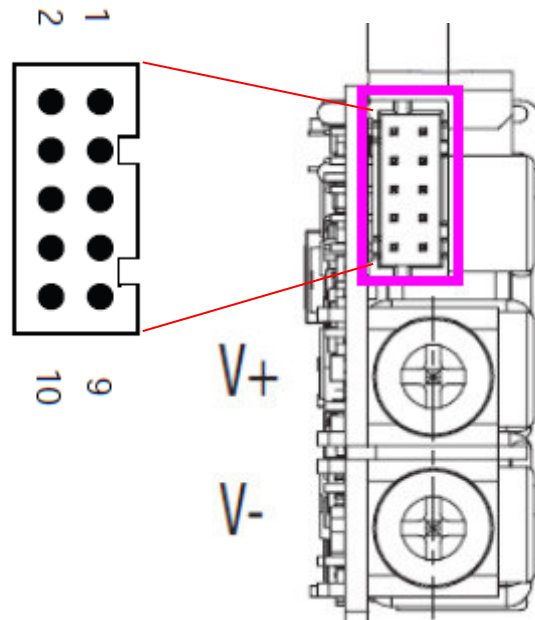


Connector Definitions - I## Module

Main Output Terminals

- V1+ – V1 Positive Output
- Com – V1 Negative Output
- V2+ – V2 Positive Output
- Com – V2 Negative Output

DC Output Control Signal Connector

- Pin 1 – -RMT sense V2
- Pin 2 – +RMT sense V2
- Pin 3 – No connection
- Pin 4 – Module inhibit rtn
- Pin 5 – Module ISO inhibit
- Pin 6 – SCOM
- Pin 7 – -RMT sense V1
- Pin 8 – No connection
- Pin 9 – No connection
- Pin 10 – +RMT sense V1

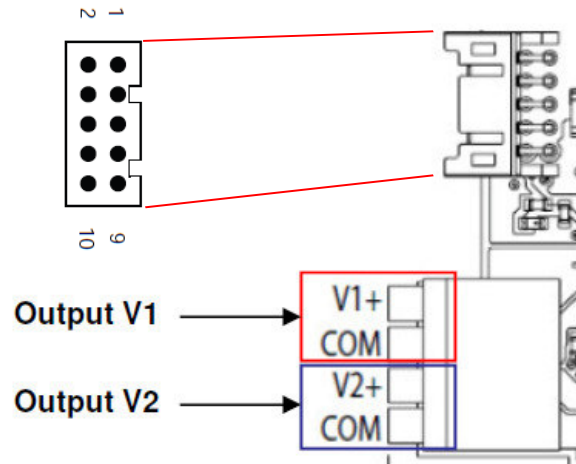


Power / Signal Mating Connectors and Pin Types

Table 4. Mating Connectors for μMP (or equivalent)

| Reference | Mating Connector or Equivalent |
|------------------------------------|---|
| AC Input (IEC Connector C14) | IEC Connector C13 |
| DC Output (Barr) | Molex 19141-0058/0063 or 19099/0048 Spade lug based on Cable Ampacity/AWG |
| Case Control Signal Connector - J1 | Landwin 2050S1000 (housing) Landwin 2053T011V (pins) or JST PHDR-10VS(housing) JST SPHD-002T-P0.5(28-24)(pins) JST SPHD-001T-P0.5(26-22) |
| Case I2C Bus Signal Connector- J2 | Landwin 2050S1000 (housing) Landwin 2053T011V (pins) or JST PHDR-10VS(housing) JST SPHD-002T-P0.5(28-24)(pins) JST SPHD-001T-P0.5(26-22) |
| DC Output Control Signal Connector | Landwin 2050S1000 (housing) Landwin 2053T011V (pins) or JST PHDR-10VS(housing) JST SPHD-002T-P0.5(28-24)(pins) JST SPHD-001T-P0.5(26-22) |

Note: The Artesyn Connector Kit for J1,J2 and DC Output Control Signal Connector is 70-841-023

LED indicator definition

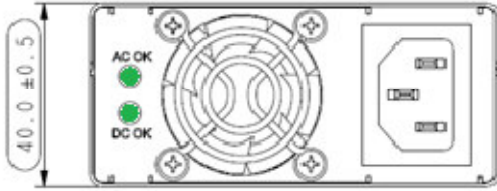

Two (green/off) LEDs are placed on the case fan panel with status conditions are shown on the table below. Each module will have a green LED indicating basic output operation (not driven by DCOK)

Table 5. LED indicator definition

| Condition | Case AC OK LED Status | Case DC OK LED Status | Module LED Status |
|--|-----------------------|-----------------------|-------------------|
| $V_{SB} = ON, V_O = OFF, AC\ Input = ON$ | Green | Blinking | OFF |
| $V_{SB} = ON, V_O = ON$ | Green | Green | Green |
| $V_O = OCP / OVP / SCP$ | Green | OFF | OFF |
| $FAN_FAULT / OTP / V_{SB} = OCP$ | Green | OFF | OFF |
| AC Not Present | OFF | OFF | OFF |

Environmental Specifications

EMC Immunity

μMP series power supply is designed to meet the following EMC immunity specifications:

Table 6. Environmental Specifications:

| Document | Description |
|---|--|
| FCC Part 15 Subpart J Class B/ EN55022, Level B | Conducted and Radiated EMI Limits |
| EN61000-3-2 | Harmonics |
| EN61000-3-3 | Voltage Fluctuations |
| IEC/EN 61000-4-2 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques – Electrostatic discharge immunity test. Level 3, performance Criteria B, otherwise, +/-8KV air, +/-6KV contact discharge for non-standard test points, |
| IEC/EN 61000-4-3 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Radiated, radio-frequency, electromagnetic field immunity test. Level 3, Criteria A, Designed to Meet. |
| IEC/EN 61000-4-4 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Electrical Fast Transient/Burst Immunity, Level 4, performance Criteria B |
| IEC/EN 61000-4-5 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques – Surge, 2KV common mode and 2KV differential mode, performance criteria A. |
| IEC/EN 61000-4-11 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques : Voltage Dips and Interruptions: 30% reduction for 500ms- Criteria B>95% reduction for 10mS, Criteria A, >95% reduction for 5000mS, Criteria C |
| EN55024 | Information Technology Equipment-Immunity Characteristics, Limits and Method of Measurements |

Safety Certifications

The μMP series power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 7. Safety Certifications for μMP series power supply system

| Document | File # | Description |
|--|--------------------|--|
| UL 60950-1/CAN/CSA C22.2 No. 60950-1 | E186249-A273-UL-X3 | US and Canada Requirements |
| ANSI/AAMI ES60601-1 CAN/CSA-C22.2 No. 60601-1 | E182560-A116-UL-X1 | Medical Requirements |
| EN60950-1 | E186249-A273-CB-1 | European Requirements. |
| EN60601-1 | | European Requirements and Medical Requirements |
| EN60950 Deviations | | International Requirements |
| CB Certificate and Report | DK-39327-A2-UL | (All CENELEC Countries) |
| CHINA CQC Approval | | China Requirements |


EMI Emissions

The μMP series has been designed to comply with the Class B limits of EMI requirements of EN55022 (FCC Part 15) and CISPR 22 (EN55022) for emissions and relevant sections of EN61000 (IEC 61000) for immunity.

μMP04 is tested at 400W at low line and >100Vac input, and 600W at high line>200Vac input using resistive load.
 μMP10 is tested at 1000W at low line and >100Vac input, and 1200W at high line>200Vac input using resistive load.
 μMP16 is tested at 1200W at low line and >100Vac input, and 1800W at high line>200Vac input using resistive load.

Conducted Emissions

The applicable standard for conducted emissions is EN55022 (FCC Part 15). Conducted noise can appear as both differential mode and common mode noise currents. Differential mode noise is measured between the two input lines, with the major components occurring at the supply fundamental switching frequency and its harmonics. Common mode noise, a contributor to both radiated emissions and input conducted emissions, is measured between the input lines and system ground and can be broadband in nature.

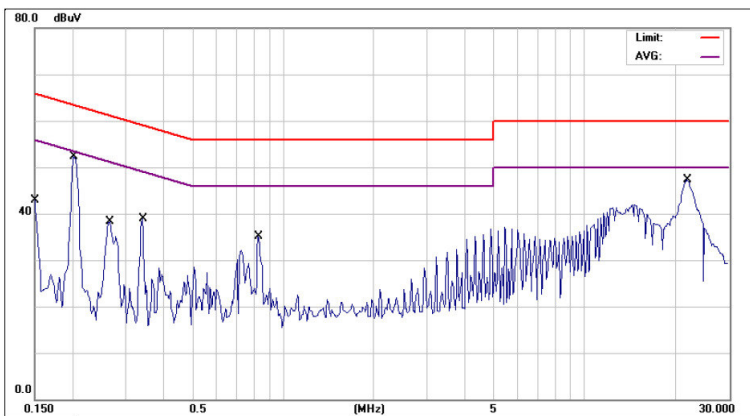

The μMP series power supplies have internal EMI filters ensure the convertors' conducted EMI levels comply with EN55022 (FCC Part 15) Class B and EN55022 (CISPR 22) Class B limits. The EMI measurements are performed with resistive loads at maximum rated loading.

Sample of EN55022 Conducted EMI Measurement at 100Vac input

Note: Blue Line refers to Artesyn Quasi Peak margin, which is 6dB below the CISPR international limit. Red Line refers to the Artesyn Average margin, which is 6dB below the CISPR international limit.

Conducted Emissions

Table 8. Conducted EMI emission specifications of the μMP series

| Parameter | Model | Symbol | Min | Typ | Max | Unit |
|----------------------------|-------|--------|-----|-----|-----|------|
| FCC Part 15, class B | All | Margin | - | - | 6 | dB |
| CISPR 22 (EN55022) class B | All | Margin | - | - | 6 | dB |

Radiated Emissions

Unlike conducted EMI, radiated EMI performance in a system environment may differ drastically from that in a stand-alone power supply. The shielding effect provided by the system enclosure may bring the EMI level from Class A to Class B. It is thus recommended that radiated EMI be evaluated in a system environment. The applicable standard is EN55022 Class B (FCC Part 15). Testing ac-dc convertors as a stand-alone component to the exact requirements of EN55022 can be difficult, because the standard calls for 1m leads to be attached to the input and outputs and aligned such as to maximize the disturbance. In such a set-up, it is possible to form a perfect dipole antenna that very few ac-dc convertors could pass. However, the standard also states that 'an attempt should be made to maximize the disturbance consistent with the typical application by varying the configuration of the test sample.

Operating Temperature

The μMP series power supplies will start and operate within stated specifications at an ambient temperature from -40 °C to 70 °C under all load conditions with internal fan. Derate each output 2.5% per degree from 50 °C to 70 °C. Cold start at -20 °C, allow 10 min warm-up before all outputs are within specification. Reverse air to 40 °C max due to fan derating.

Forced Air Cooling


The μMP series power supplies include internal cooling fans as part of the power supply assembly to provide forced air-cooling to maintain and control temperature of devices and ambient temperature in the power supply to appropriate levels. There are 1 fan in μMP04 case and 2 fans in μMP10/16 case. The standard direction of airflow is from the fan side through the power supply with exhaust on the output side of the power supply. Reverse airflow option is required with some derating allowed. Allow 40 °C max ambient for reverse airflow.

Fan speed is controlled by thermal sensors in case and modules. In the event of a fan fault condition, the unit will protect by latching off. AC input or Global Inhibit must be recycled to turn the unit back on after a fan fault condition.


Power Derating Curves

μMP series can operate up to a maximum ambient temperature of 70 °C with derating, below is the μMP10 derating curves.

Standard Fan (12 V/24 V/48 V)

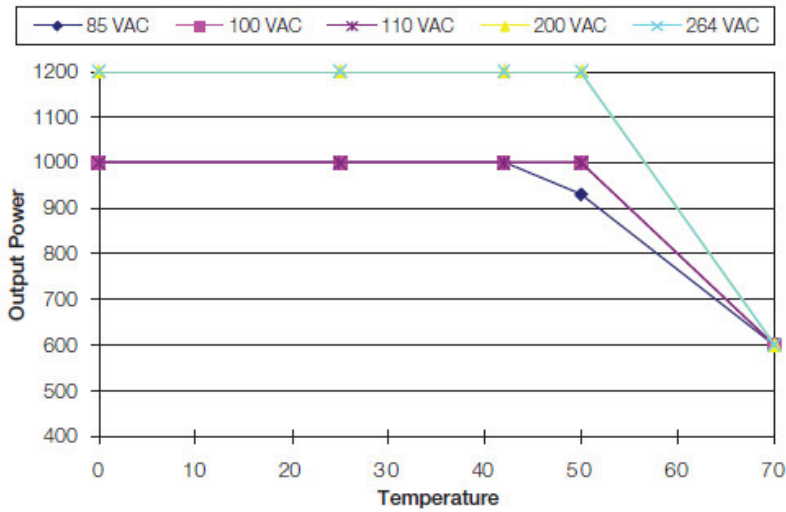

Reverse FAN (12 V/24 V/48V)

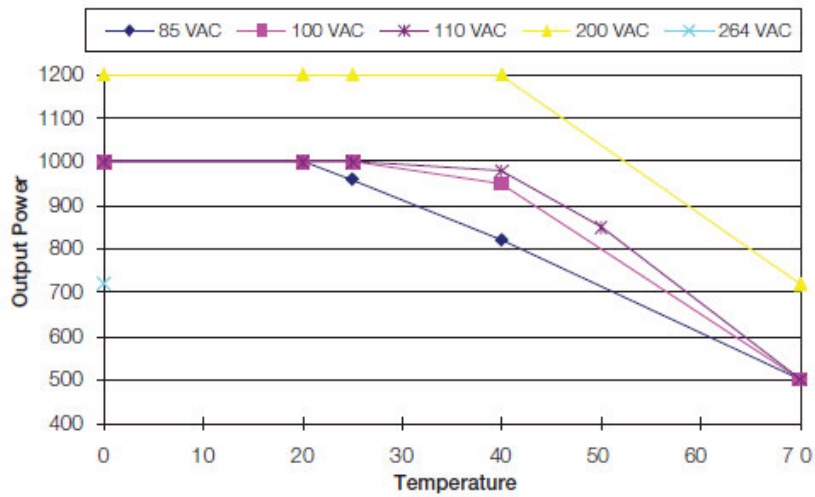

Storage and Shipping Temperature / Humidity

The μMP series power supplies can be stored or shipped at temperatures between -40 °C to +85 °C and relative humidity from 10% to 95% non-condensing.

Altitude

The μMP series will operate within specifications at altitudes up to 10,000 feet above sea level. The power supply will derate linear to 50% from 10,000 to 30,000 feet above sea level.

Humidity

The μMP series will operate within specifications when subjected to a relative humidity from 10% to 95% non-condensing. The μMP series can be stored in a relative humidity from 10% to 95% non-condensing.

Vibration

The μMP series power supply will pass the following vibration specifications:

Non-Operating Random Vibration

| | | | |
|-----------------|-------------------------------|---------------|--------------------------|
| Acceleration | 40 | gRMS | |
| Frequency Range | 10-2000 | Hz | |
| Duration | 30 | mins | |
| Direction | 3 mutually perpendicular axis | | |
| PSD Profile | FREQ | SLOPE | PSD |
| | | dB/oct | g²/Hz |
| | 10 Hz | --- | 0.005 g ² /Hz |
| | 20 Hz | --- | 0.01 g ² /Hz |
| | 80-350 Hz | --- | 0.04 g ² /Hz |
| | 2000 Hz | --- | 0.007 g ² /Hz |

Operating Random Vibration

| | | | |
|-----------------|-------------------------------|---------------|---------------------------|
| Acceleration | 40 | gRMS | |
| Frequency Range | 10-500 | Hz | |
| Duration | 30 | mins | |
| Direction | 3 mutually perpendicular axis | | |
| PSD Profile | FREQ | SLOPE | PSD |
| | | dB/oct | g²/Hz |
| | 10-350Hz | --- | 0.04 g ² /Hz |
| | 500 Hz | --- | 0.0198 g ² /Hz |

Shock

The μMP power supply will pass the following vibration specifications:

Non-Operating Half-Sine Shock

| | | |
|--------------|----------------------------|------|
| Acceleration | 30 | G |
| Duration | 26 | msec |
| Pulse | Half-Sine | |
| No. of Shock | 3 shock on each of 6 faces | |

Operating Half-Sine Shock

| | | |
|--------------|----------------------------|------|
| Acceleration | 40 | G |
| Duration | 6 | msec |
| Pulse | Half-Sine | |
| No. of Shock | 3 shock on each of 6 faces | |

Power and Control Signal Descriptions

AC Input Connector

This connector supplies the AC Mains to the μMP series power supply.

- Pin 1 - AC Neutral
- Pin 2 - AC Line(hot)
- Pin 3 - Chassis(earth) ground




Case Control Signal Connector - J1

The μMP series contain a 10 pins control signal header providing an analogue control interface, standby power and I²C interface signal connections.

Input AC OK - “collector” / Input AC OK - “emitter”- (pins 1,2)




Input ACOK - “collector” and Input ACOK - “emitter” are output of an uncommitted bipolar junction transistor, there is an internal 1K ohm resistor in series with the collector of the transistor for current limiting. The transistor shall turn ON when the Input Mains level is Good >85Vac, it shall turn OFF when input voltage is <80Vac. Sink current: 50mA maximum, 5ms minimum warning time.

A green LED is provided in the μMP case as visual indicator of the status of ACOK signal.

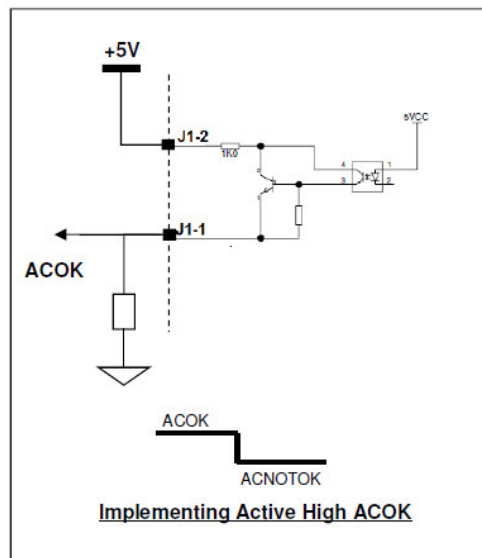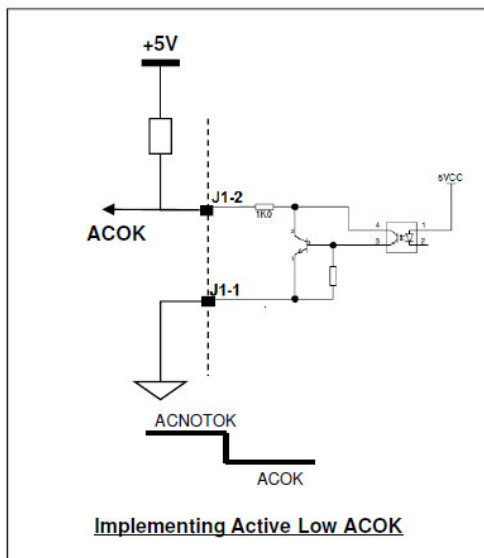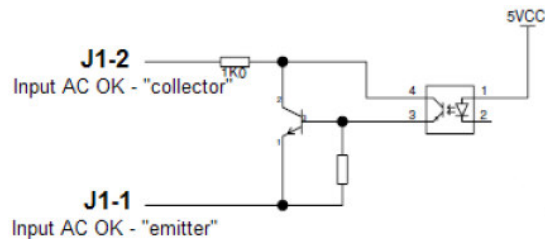



Global DC OK - “collector” /Global DC OK - “emitter” - (pins 3,4)

Global DC OK - “collector” and Global DC OK - “emitter” are output signal of uncommitted bipolar junction transistor, there is an internal 1K ohm resistor in series with the collector of the transistor for current limiting. The transistor shall turn ON when the DC output of all modules have good regulation, otherwise it will turn OFF. A green LED is provided as a visual indicator of the DC OK status. Sink current: 50mA max.

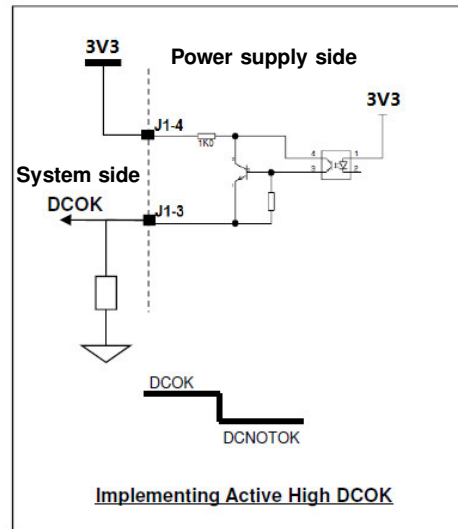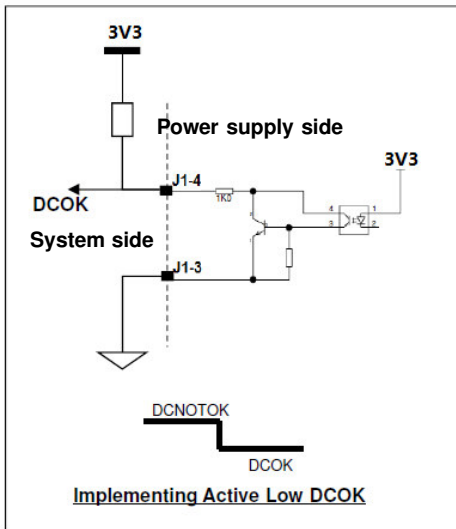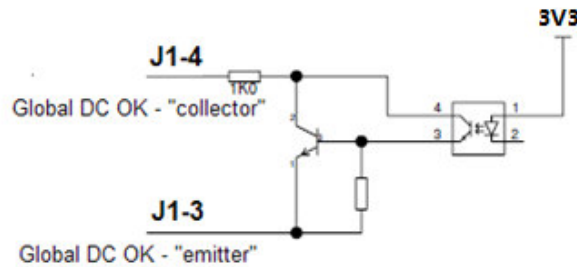

Global inhibit/optional enable logic “1”- (pin 6)

Global inhibit/optional enable logic “1”(default setting). Active low, when pin is left open or pulled Low, all the modules are ON. Pulling the pin to logic level Hi (>3V- 4V) will turn OFF all the modules of the power supply. There is an internal 2.2K ohm resistor pulling the signal to ground to make the level low when pin is left floating.

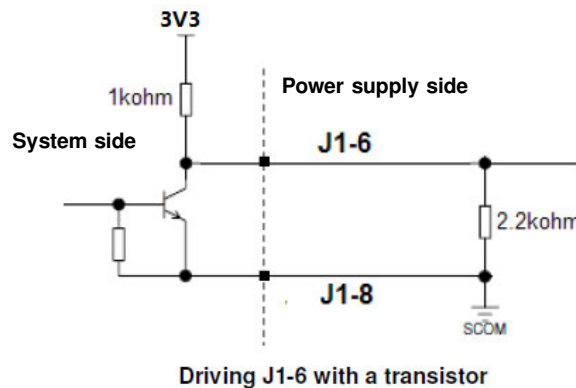


Global inhibit/optional enable logic “0” - (pin 7) - For μMP 10/16

Enable logic “0” (default setting). Active high - when pin is left open or pulled high, all the PSU modules are ON. Pulling pin 7 to <math><0.5V</math> will turn OFF all the modules. There is an internal 2.2K ohm resistor pulling the signal to internal 3.3V supply to make the level high when pin is left floating.




Logic signal at Pin J1-7

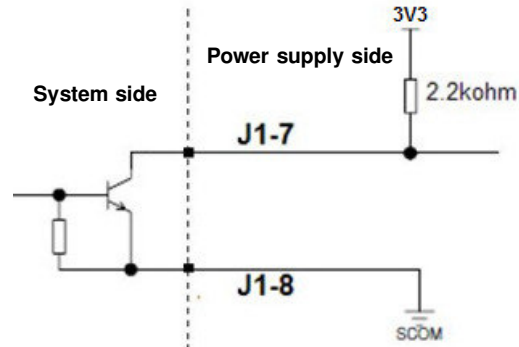

Driving J1-7 with a transistor

Global inhibit/optional enable logic “0” - (pin 7) - For μMP 04

Enable logic “0” (default setting). Active high - when pin is left open or pulled high, all the PSU modules are ON. Pulling pin 7 to <math><0.5V</math> will turn OFF all the modules. There is no internal pull up to 3.3V for EN0 on μMP04. Instead level shifter is implemented for EN0 on μMP04. If EN0 pin is left floating, you will measure 3.3V on the pin.

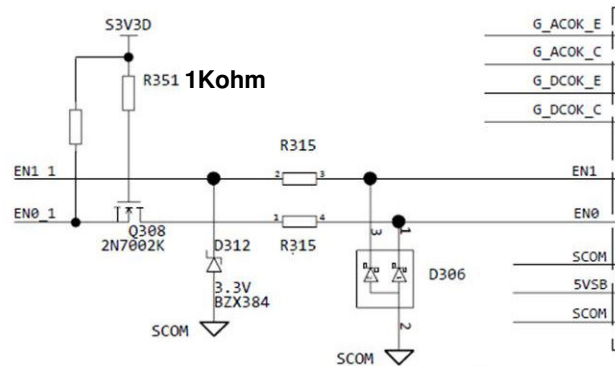

Advantage of the level shifter will allow customer to drive EN0 flexibly.

- Gate of 3.3V circuit
- Gate of 5V circuit
- Comparator/Op-amp output of 12V circuit
- OC(Open Collector as you shown in your diagram
- Other output or gate that will not exceed the derating of the level shifter

Note: Pin 6 and pin 7 are independent signals, both signals must assume the correct logic to turn ON the modules. By default, Pin 6 is low(when pin is floating) and pin 7 is high(when pin is floating) and all modules are ON; change the logic state of either pins to turn the output modules OFF.

Note:Case option code 3 “Global Enable” reverses the modules ON/OFF status described above.

Global inhibit/optional enable return - (pin 8)

This pin is ground reference for global enable/optional enable. It is electrically connected to pin 10 (+5VSB housekeeping Return).

+5VSB housekeeping - (pin 9)

This pin is the standby output of the power supply rated 5V/1A. This output is available every time the input AC voltage to the power supply is within 85Vac - 264Vac. This output is not affected by global Inhibit function.

+5VSB housekeeping return - (pin 10)

The ground reference of +5VSB housekeeping, this ground is not connected to the chassis of the power supply.

Case I²C Bus Signal Connector- J2

5Vcc bus - (pin 1)

This pin is an input to the μMP case, supplying 5V to this signal will provide external power to the I²C devices - EEPROM and Microcontroller. The pin can be used to enable the I2C communication using external power supply to allow reading of manufacturing from a non-working PSU without powering the supply. Do not supply voltage >5.5V to prevent damaging the I2C devices.

Secondary return (COM) - (pin 3)

Ground reference for the signals of J2 connector. This pin is electrical connected to pin 10(+5V V_{SB} housekeeping return of J1 connector) .

SDA, SCL (I²C Data and Clock Signals) - (pins 2,4)

Please refer to “Communication Bus Descriptions” section.

A2, A1,A0 (I²C Address BIT 2, BIT1, BIT0 Signals) - (pins 5,7,9)

Please refer to “Communication Bus Descriptions” section.


DC Output Control Signal Connector

Current Share - (pin 3)

Current share pin is an input/output signal of the module, when multiple modules are connected in parallel the current share pins of each of the parallel modules must be connected together to achieve equal current sharing. Failure to connect the current sharing pin while the output of the modules are in parallel connection can cause one or more of the modules to sink current from the other parallel modules and fail. Since the output voltage of current share signal is proportional to the actual output current the pin can be used as output current monitor, the pin will have 6V nominal output at full rated load.

Module Inhibit Return and Module ISO Inhibit - (pins 4,5)

Isolated Inhibit input signals use to remotely enable/disable the module, apply 5V across the Module ISO Inhibit and Module Inhibit Return to disable the module. This pin driving the diode side of an optocoupler to drive the internal enable signal, an internal 1K ohm is in series with the diode.

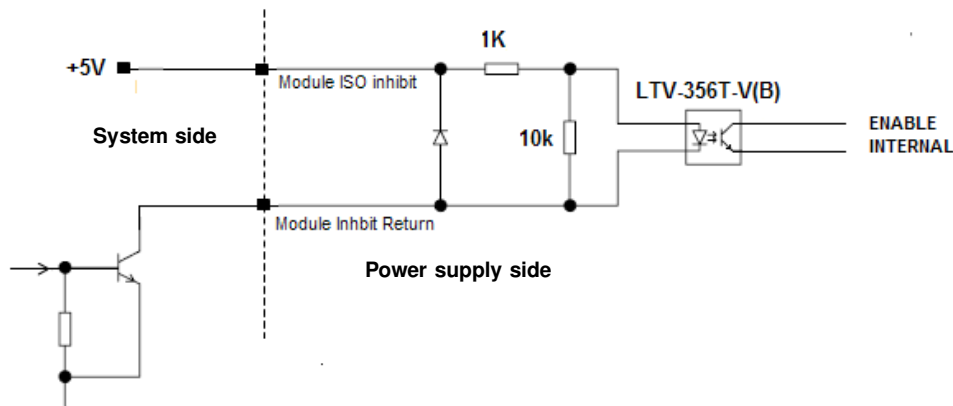


SCOM - (pin 6)

Ground Reference of the output module, this is connected to 'V-' output of the module.

- RMT sense/+RMT sense - (pins 7,10)


Remote sense of the output modules use to compensate up to 500mV of cable drop. Connect the -RMT sense and +RMT sense to the output 'V-' and 'V+' respectively at the point of load to compensate up to 500mV of voltage drop along the power lines.

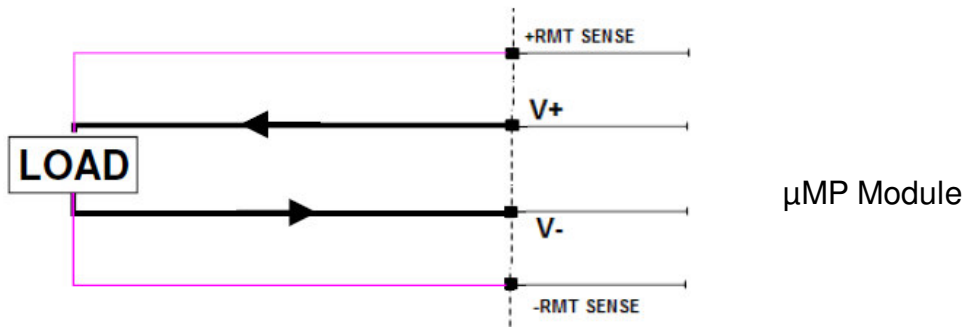


Margin and Remote margin/V prog - (pins 8,9)

Used to remotely adjust the output voltage regulation to 95% (Margin Low) or 105% (Margin High). Connect Remote margin (Pin 9) to Margin (Pin 8) to adjust voltage output level to 105% of the rated output. Connect Remote margin (Pin9) to SCOM (Pin 6) to adjust the voltage output level to 95% of the rated.

Remote margining using Single Pole Center Off switch to achieve 3 possible voltage level

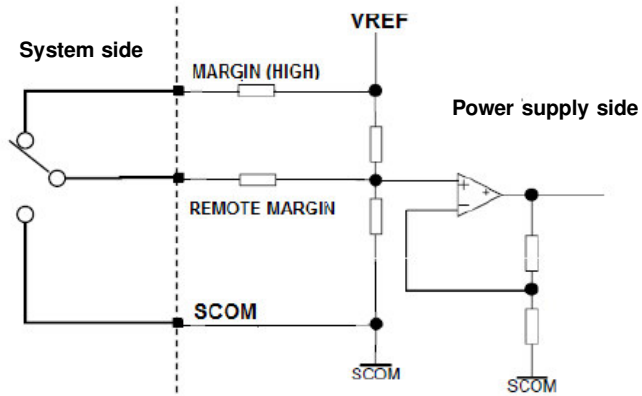

Remote margining using a potentiometer to get voltage adjustment range between 95% -105% of nominal rating.

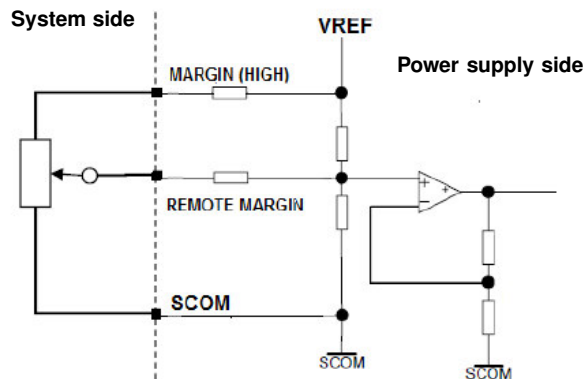

Since pin9 of signal connector on the module has the dual functions, remote margin and Vprog. By default it is remote margin. Table 9 provides modification reference to obtain the Vprog function. With this modification, Vprog function allows system to linearly adjust the output voltage by varying the control voltage on the Vprog pin (pin9 of the signal connector) with regards to output return.

Table 9. Vprog Modification for reference

| Vprog Voltage (V) | uMP Module | Output Voltage Range (V) | Change Option Resistors | | |
|-------------------|------------|--------------------------|-------------------------|-----------|-----------|
| | | | R74 (KΩ) | R109 (KΩ) | R148 (KΩ) |
| 0-5 | 48V-G2 | 0 to 48 | 1 | 2 | 12 |
| | 24V-G2 | 0 to 24 | 1 | 2 | 12 |
| | 12V-G2 | 0 to 12 | 1 | 2 | 11 |
| | 5V-G2 | 0 to 5 | 1 | 2 | 12 |

With the resistors modification, the control voltage can be defined to meet system requirement. Figure 36 demonstrates an example of Vprog (0V to 5V).

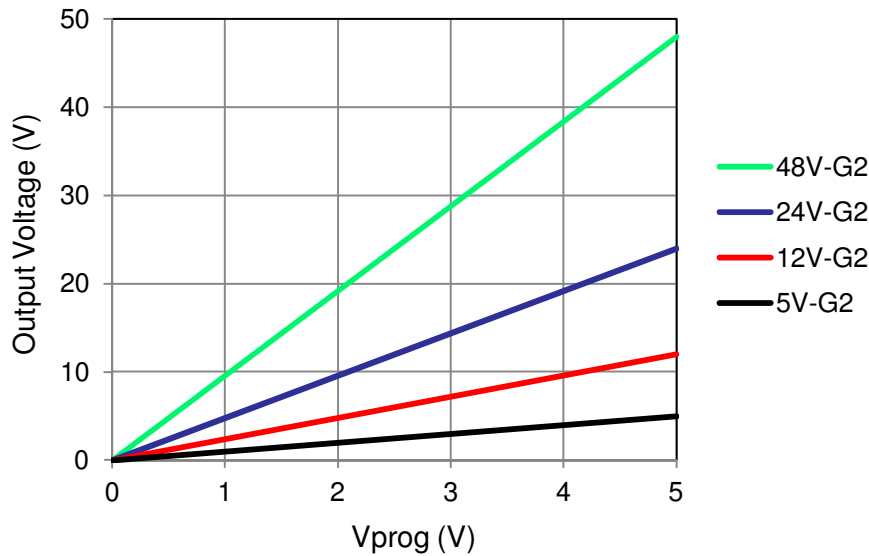


Figure 36 Example of Vprog vs. output Voltage

DC Output Control Signal Connector- I## Module

-RMT sense V2 / +RMT sense V2 - (pins 1,2)

Remote sense for output V2, can compensate up to 500mV cable drop. Connect the -RMT sense V2 and +RMT sense V2 to the output 'V2 COM' and 'V2+' respectively at the point of load to compensate up to 500mV of voltage drop along the power lines.

Module Inhibit Return and Module ISO Inhibit - (pins 4,5)

Refer to page 51. The Module Inhibit enable/disable both outputs.

SCOM - (pin 6)

Ground Reference of the output module, this is connected to COM of output V2.

-RMT sense V1 / +RMT sense V1 - (pins 7,10)

Remote sense for output V1, can compensate up to 500mV cable drop. Connect the -RMT sense V1 and +RMT sense V1 to the output 'V1 COM' and 'V1+' respectively at the point of load to compensate up to 500mV of voltage drop along the power lines.

Communication Bus Descriptions

I²C Bus Signals - J2

The μMP series power supply contains enhanced monitor and control functions implemented via the I²C bus. The μMP series I²C functionality (PMBus™ and FRU data) can be accessed via the output connector control signals. The communication bus is powered either by the internal 5V supply or from an external power source connected to the StandBy Output (ie: accessing an unpowered power supply as long as the StandBy Output of another power supply connected in parallel is on).

If units are connected in parallel or in redundant mode, the StandBy Outputs must be connected together in the system. Otherwise, the I²C bus will not work properly when a unit is inserted into the system without the AC source connected.

Note: PMBus™ functionality can be accessed only when the PSU is powered-up.

Guaranteed communication I²C speed is 100KHz.

SDA, SCL (I²C Data and Clock Signals) - (pins 2, 4)

These are pins for I²C communication and must be pulled-up in the system by 20K ohm resistor to 3.3V housekeeping; a current source pull-up can also be used. If multiple units are used inside a system, the 3.3V housekeeping of each unit must be connected in parallel in the system, otherwise, the SCL and SDA bus will be pulled low by the unit without AC power.

A0, A1, A2 (I²C Address BIT 0, BIT1 Signals) - (pins 5,7,9)

Multiple configured μMP power supplies can be used in a single system, the power supplies can have parallel outputs or providing multiple outputs. The μMP case has three address pins allowing the system to assign different addresses to multiple PSUs used within the system. The I²C devices inside the μMP case are EEPROM to store FRU data and microcontroller for PMBus. The table below listed all the possible addresses of the two I²C devices inside the PSU. Pull the address pin to secondary return (COM) to set the address to "0" or High (or open) to set it the address to "1".

I²C Bus Communication Interval


The interval between two consecutive I²C communications to the power supply should be at least 50ms to ensure proper monitoring functionality.

I²C Bus Signal Integrity

The noise on the I²C bus (SDA, SCL lines) due to the power supply will be less than 500mV peak-to-peak. This noise measurement should be made with an oscilloscope bandwidth limited to 100MHz. Measurements should be made at the power supply output connector with 2.2K ohm resistors pulled up to StandBy Output and 20pf ceramic capacitors to StandBy Output Return.

The noise on the address lines A0 and A1 will be less than 100mV peak-to-peak. This noise measurement should be made at the power supply output connector.

I²C Bus Internal Implementation, Pull-ups and Bus Capacitances

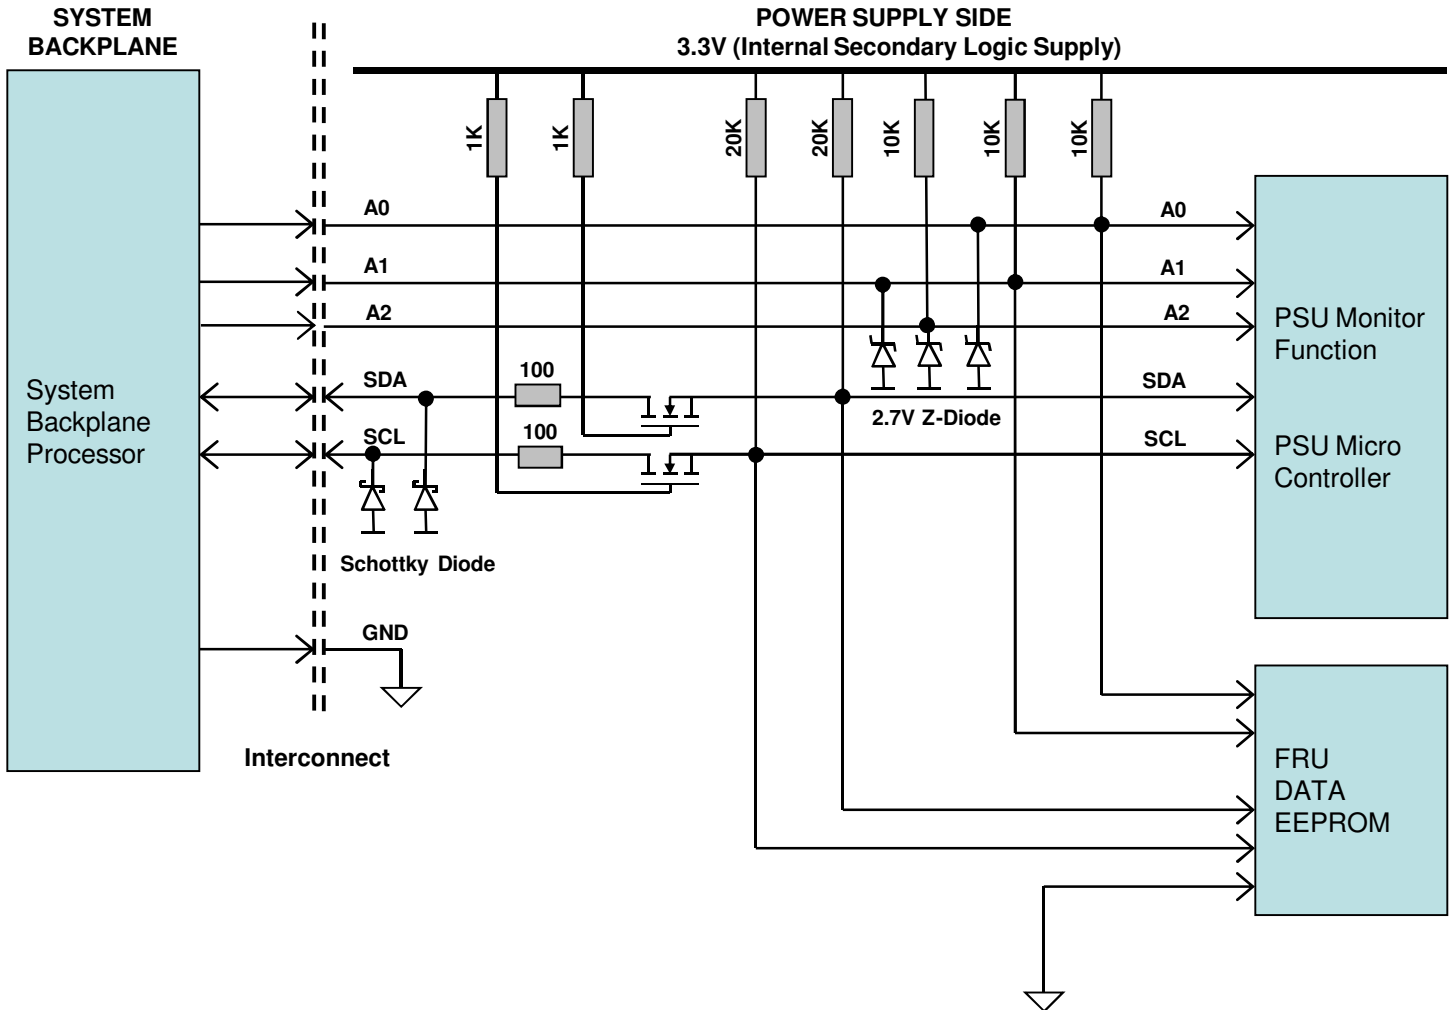

I²C Bus - Recommended external pull-ups:

Electrical and Interface specifications of I²C signals (referenced to StandBy Output Return pin, unless otherwise indicated):

| Parameter | Condition | Symbol | Min | Typ | Max | Unit |
|---------------------------------------|------------|-----------|-----|------|-----|------|
| SDA, SCL internal pull-up resistor | | R_{int} | - | 20 | - | Kohm |
| SDA, SCL internal bus capacitance | | C_{int} | - | 0 | - | pF |
| Recommended external pull-up resistor | 1 to 8 PSU | R_{ext} | - | 2.2K | - | ohm |

Logic Levels


μMP series power supply I²C Communication Bus will respond to logic levels as per below:

Logic High: 3.3V Nominal (Specs is 2.1V to 5.5V)**

Logic Low: 500mV nominal (Specs is 800mV max)**

**Note: Artesyn 73-769-001 I²C adapter was used.

Timings

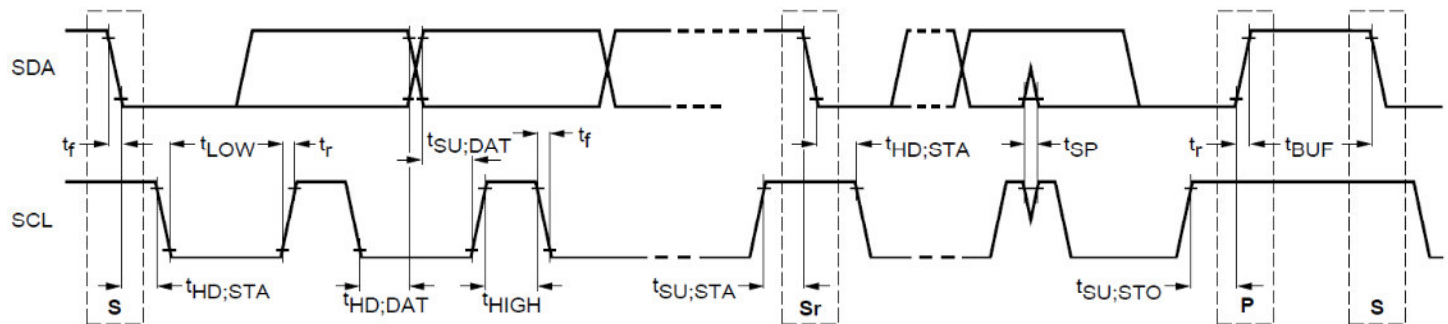

| Parameter | Symbol | Standard-Mode Specs | | Actual Measured | | Unit |
|--|---------------------|---------------------|------|-----------------|-----------|------|
| | | Min | Max | | | |
| SCL Clock Frequency | f _{SCL} | 0 | 100 | 99 | | KHz |
| Hold time (repeated) START condition | t _{HD;STA} | 4.0 | - | 4.68 | | μS |
| LOW period of SCL clock | t _{LOW} | 4.7 | - | 14.8 | | μS |
| HIGH period of SCL clock | t _{HIGH} | 4.0 | - | 4.1 | | μS |
| Setup time for repeated START condition | t _{SU;STA} | 4.7 | - | 5.7 | | μS |
| Data hold time | t _{HD;DAT} | 0 | 3.45 | 0.5 | | μS |
| Data setup time | t _{SU;DAT} | 250 | - | 521 | | nS |
| Rise time | t _r | - | 1000 | SCL = 896 | SDA = 540 | nS |
| Fall time | t _f | - | 300 | SCL = 132 | SDA = 220 | nS |
| Setup time for STOP condition | t _{SU;STO} | 4.0 | - | 5.66 | | μS |
| Bus free time between a STOP and START condition | t _{BUF} | 4.7 | - | 31.06*** | | μS |

***Note Artesyn 73-769-001 I²C adapter (USB-to-I²C) and Universal PMBus™ GUI software was used

Device Addressing

The μMP series will respond to supported commands on the I²C™ bus that are addressed according to pins A0,A1 and A2 pins of output connector.

Address pins are held high by default via pulled up to internal 3.3V housekeeping with a 10K ohm resistor. To set the address as “0”, the corresponding address line should be pulled down to logic ground level. Below tables show the address of the power supply with A0,A1 and A2 pins set to either “0” or “1”.

| PSU Slot | Slot ID Bits | | | PMBus™ Address | EEPROM (FRU) Read Address |
|----------|--------------|----|----|----------------|---------------------------|
| | A0 | A1 | A2 | | |
| 1 | 0 | 0 | 0 | 0x30 | 0xA0 |
| 2 | 0 | 0 | 1 | 0x32 | 0xA2 |
| 3 | 0 | 1 | 0 | 0x34 | 0xA4 |
| 4 | 0 | 1 | 1 | 0x36 | 0xA6 |
| 5 | 1 | 0 | 0 | 0x38 | 0xA8 |
| 6 | 1 | 0 | 1 | 0x3A | 0xAA |
| 7 | 1 | 1 | 0 | 0x3C | 0xAC |
| 8 | 1 | 1 | 1 | 0x3E* | 0xAE |


* Default PMBus™ address when A0, A1, A2 are left open.

I²C Clock Synchronization

The μMP power supply might apply clock stretching. An addressed slave power supply may hold the clock line (SCL) low after receiving (or sending) a byte, indicating that it is not yet ready to process more data. The system master that is communicating with the power supply will attempt to raise the clock to transfer the next bit, but must verify that the clock line was actually raised. If the power supply is clock stretching, the clock line will still be low (because the connections are open-drain).

The maximum clock low timeout for μMP is 25 millisecond.

The maximum transaction timeout condition for clock stretching for μMP is 100 millisecond.

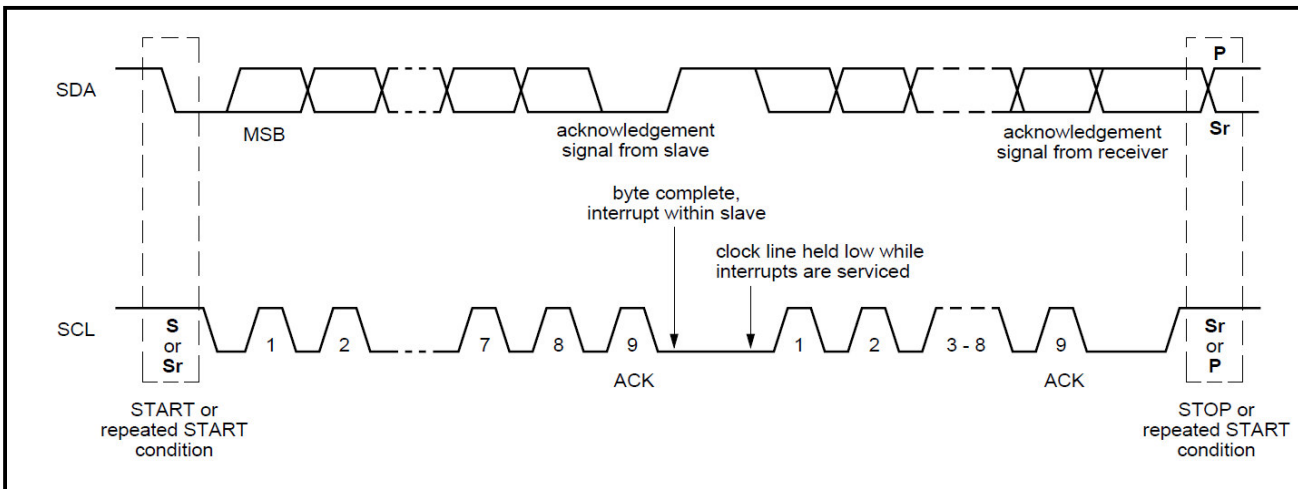


PMBus™ Interface Support

The μMP is compliant with the industry standard PMBus™ protocol for monitoring and control of the power supply via the I²C interface port.

μMP Series PMBus™ General Instructions

Equipment Setup

The following is typical I²C communication setup:

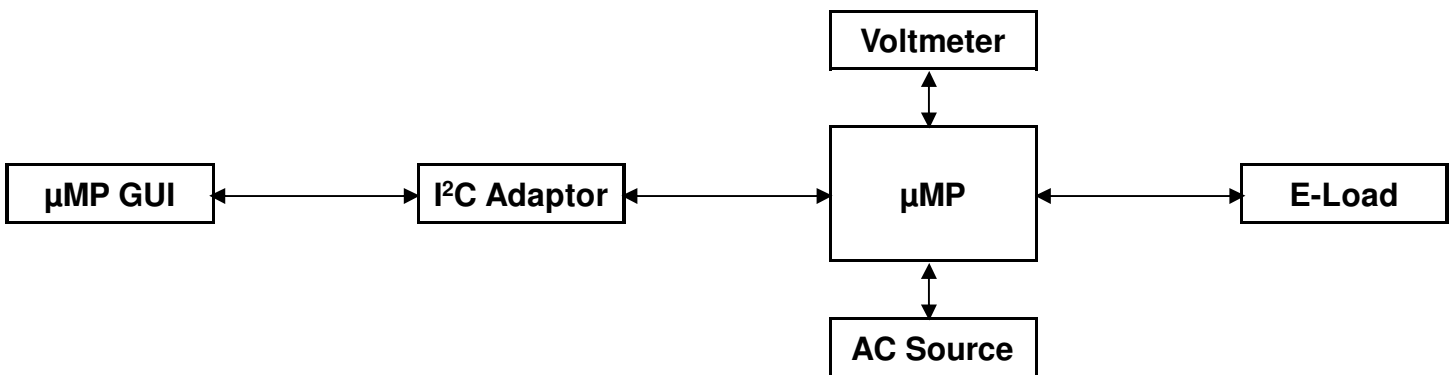

PMBus™ Writing Instructions

When writing to any PMBus™ R/W registers, ALWAYS do the following:

Disable Write Protect (command 10h) by writing any of the following accordingly:

- Levels: 00h – Enable writing to all writeable commands
- 20h – Disables write except 10h, 01h, 00h, 02h and 21h commands
- 40h – Disables write except 10h, 01h, and 00h commands
- 80h – Disable write except 0x00h

To save changes on the USER PMBus™ Table:

Use send byte command: 15h STORE_USER_ALL

Wait for 5 seconds, turn-off the PSU, wait for another 5 seconds before turning it on

μMP Series Support PMBus™ Command List

The μMP Series is compliant with the industry standard PMBus™ protocol for monitoring and control of the power supply via the i²C interface port.

μMP Series Supported PMBus™ Command List:

| Command Code | Command Name | Default Value | Access Type | Data Bytes | Data Format | Description |
|------------------------|-----------------------|---------------|-------------|------------|---|---|
| 00h | PAGE | 00 | R | 1 | Hex | |
| 01h | OPERATION | 80 | R | 1 | | Used to turn the unit ON/OFF |
| | b7:6 | 10b | | | | |
| | b5:4 | 00b | | | | |
| | b3:2 | 00b | | | | |
| | b1:0 | 00b | | | | Reserved |
| 02h | ON_OFF_CONFIG | 1E | R | 1 | | |
| 03h | CLEAR_FAULTS | 0 | S | 0 | | |
| 10h | WRITE_PROTECT | 80 | R/W | 1 | | Used to Control Writing to the PMBus Device 80h - Disables write except 10h 40h - Disables write except 10h, 01h, 00h 20h - Disables write except 10h,01h,00h,02h 00 - Enables write to all writeable commands. |
| 15h | STORE_USER_ALL | - | S | 0 | | Copies the Operating memory table to the matching USER non-volatile memory. |
| 19h | CAPABILITY | 80 | R | 1 | | |
| 35h | VIN_ON | - | R | 2 | | Default: 82Vac |
| 36h | VIN_OFF | - | R | 2 | | Default: 75Vac |
| 3Ah | FAN_CONFIG_1_2 | D5 | R | 1 | | Used to configure up to 2 fans associated with one PMBus device |
| 3Bh | FAN_COMMAND_1 | 0 | R/W | 2 | Direct | Default: 0RPM Valid Range: 0 – 32767RPM |
| 50h | OT_FAULT_RESPONSE | 78 | R | 1 | | Turn PSU OFF and will retry indefinitely |
| 58h | VIN_UV_WARN_LIMIT | EA90 | R | 2 | Linear | (82Vac) |
| 59h | VIN_UV_FAULT_LIMIT | EA58 | R | 2 | Linear | (75Vac) |
| 5Ah | VIN_UV_FAULT_RESPONSE | F8 | R | 1 | | |
| 78h | STATUS_BYTE | 00 | R | 1 | | Returns the summary of critical faults |
| | b7 – BUSY | | | | | A fault was declared because the device was busy and unable to respond. |
| | b6 – OFF | | | | | Unit is OFF |
| | b5 – VOUT_OV | | | | | Output over-voltage fault has occurred |
| | b4 – IOUT_OC | | | | | Output over-current fault has occurred |
| | b3 - VIN_UV | | | | | An input under-voltage fault has occurred |
| | b2 - TEMPERATURE | | | | | A temperature fault or warning has occurred |
| | b1 – CML | | | | | A communication, memory or logic fault has occurred. |
| b0 – NONE OF THE ABOVE | | | | | A Fault Warning not listed in bits[7:1] has occurred. | |

μMP Series Supported PMBus™ Command List:

| Command Code | Command Name | Default Value | Access Type | Data Bytes | Data Format | Description |
|------------------------|--------------------|---------------|-------------|------------|---|---|
| 79h | STATUS_WORD | 0000 | R | 2 | | Summary of units Fault and warning status. |
| | b15 – VOUT | | | | | An output voltage fault or warning has occurred |
| | b14 – IOUT/POUT | | | | | An Output current or power fault or warning has occurred. |
| | b13 – INPUT | | | | | An input voltage, current or power fault or warning as occurred. |
| | b12 – MFR | | | | | A manufacturer specific fault or warning has occurred. |
| | b11 – Global DC OK | | | | | The Global DC OK signal is de-asserted |
| | b10 - FANS | | | | | A fan or airflow fault or warning has occurred. |
| | b9 – OTHER | | | | | A bit in STATUS_OTHER is set. |
| | b8 – UNKNOWN | | | | | A fault type not given in bits [15:1] of the STATUS_WORD has been detected. |
| | b7 – BUSY | | | | | A fault was declared because the device was busy and unable to respond. |
| | b6 – OFF | | | | | Unit is OFF |
| | b5 – VOUT_OV | | | | | Output over-voltage fault has occurred |
| | b4 – IOUT_OC | | | | | Output over-current fault has occurred |
| | b3 - VIN_UV | | | | | An input under-voltage fault has occurred |
| | b2 – TEMPERATURE | | | | | A temperature fault or warning has occurred |
| | b1 – CML | | | | | A communication, memory or logic fault has occurred. |
| b0 – NONE_OF_THE_ABOVE | | | | | A fault or warning not listed in bits[7:1] of this byte has occurred. | |
| 7Ch | STATUS_INPUT | 00 | R | 1 | | Input related faults and warnings |
| | b7 | | | | | VIN Overvoltage Fault |
| | b6 | | | | | VIN Overvoltage Warning |
| | b5 | | | | | VIN Undervoltage Warning |
| | b4 | | | | | VIN Undervoltage Fault |
| | b3 | | | | | Unit is OFF for insufficient Input Voltage |
| | b2 | | | | | IIN Overcurrent Fault |
| | b1 | | | | | IIN Overcurrent Warning |
| | b0 | | | | | PIN overpower Warning |
| 7Dh | STATUS_TEMPERATURE | 00 | R | 1 | | Temperature related faults and warnings |
| | b7 | | | | | Overtemperature Fault |
| | b6 | | | | | Overtemperature Warning |
| | b5 | | | | | Undertemperature Warning |
| | b4 | | | | | Undertemperature Fault |
| b3:0 | | | | | reserved | |
| 7Eh | STATUS_CML | 00 | R | 1 | | Communications, Logic and Memory |
| | b7 | | | | | Invalid or unsupported Command Received |
| | b6 | | | | | |
| | b5 | | | | | Packet Error Check Failed |
| | b4 | | | | | Memory Fault Detect, CRC Error |
| | b3 | | | | | |
| | b2 | | | | | |
| | b1 | | | | | |
| b0 | | | | | | |

μMP Series Supported PMBus™ Command List:

| Command Code | Command Name | Default Value | Access Type | Data Bytes | Data Format | Description |
|--------------|---------------------|-----------------|-------------|------------|-------------|---|
| 80h | STATUS_MFR_SPECIFIC | 00 | R | 1 | | Manufacturer Status codes |
| | b7 | | | | | Bulk OK, 1- Bulk is within range and is ready for use |
| | b6 | | | | | Not Used |
| | b5 | | | | | Not Used |
| | b4 | | | | | Not Used |
| | b3 | | | | | Not Uesd |
| | b2 | | | | | Not Uesd |
| | b1 | | | | | Standby Fault, 1 If there's a standby fault. |
| | b0 | | | | | PS_ON Pin Status 1 – asserted, 0 - deasserted |
| 81h | STATUS_FANS_1_2 | 00 | R | 1 | | |
| | b7 | | | | | Fan 1 Fault |
| | b6 | | | | | Fan 2 Fault |
| | b5 | | | | | Fan 1 Warning |
| | b4 | | | | | Fan 2 Warning |
| | b3 | | | | | Fan_1 Speed Overridden |
| | b2 | | | | | Fan_2 Speed Overridden |
| | b1 | | | | | |
| | b0 | | | | | |
| 88h | READ_VIN | - | R | 2 | Linear | Returns input Voltage in Volts ac. |
| 89h | READ_IIN | - | R | 2 | Linear | Returns input Current in Amperes |
| 8Dh | READ_TEMPERATURE_1 | - | R | 2 | Linear | Primary Hotspot |
| 8Eh | READ_TEMPERATURE_2 | - | R | 2 | Linear | Standby Hotspot |
| 8Fh | READ_TEMPERATURE_3 | - | R | 2 | Linear | Secondary Ambient |
| 90h | READ_FAN_SPEED_1 | - | R | 2 | Linear | Speed of Fan 1 |
| 91h | READ_FAN_SPEED_2 | - | R | 2 | Linear | Speed of Fan 2 |
| 97h | READ_PIN | - | R | 2 | Linear | Returns the input power, in Watts. |
| 98h | PMBUS_REVISION | 22 | B | 1 | | Reads the PMBus revision number |
| 99h | MFR_ID | "ARTESYN" | BR, ASCII | Varies | | Abbrev or symbol of manufacturers name. |
| 9Ah | MFR_MODEL | "μMP" | BR, ASCII | Varies | | Manufacturers Model number, ASCII format |
| 9Bh | MFR_REVISION | "AA" | BR, ASCII | Varies | | Manufacturers, revision number, ASCII format |
| 9Ch | MFR_LOCATION | "Philippines" | BR, ASCII | Varies | | Manufacturers facility, ASCII format |
| 9Dh | MFR_Data | "xxxxxx" | BR | Varies | | Manufacture Date, ASCII format structure : YYMMDD |
| 9Eh | MFR_Serial | "xxxxxxxxxxxxx" | BR | Varies | | Default: "K975YYWWSSSSSSAAP" for 73-954-0001C-G2 , "K974YYWWSSSSSSAAP" for 73-954-0001T-G2 |
| A0h | MFR_VIN_MIN | EAA8 | R | 2 | Linear | Minimum Input Voltage (85Vac) |
| A1h | MFR_VIN_MAX | FA10 | R | 2 | Linear | Maximum Input Voltage (264Vac) |
| A2h | MFR_IIN_MAX | D340 | R | 2 | Linear | Maximum Input Current (13A) |
| A7h | MFR_POUT_MAX | B20 | R | 2 | Linear | Maximum Output Power (1200W) |
| A8h | MFR_TAMBIENT_MAX | F38D | R | 2 | Direct | Maximum Operating Ambient Temperature (Secondary Ambient) (70degC) |
| A9h | MFR_TAMBIENT_MIN | E580 | R | 2 | Direct | Minimum Operating Ambient Temperature (Secondary Ambient) (-40degC) |


μMP Series Supported PMBus™ Command List:

| Command Code | Command Name | Default Value | Access Type | Data Bytes | Data Format | Description |
|--------------|-----------------|---------------|-------------|------------|-------------|----------------------------|
| D6h | MODULE_EN_DELAY | 0 | BR | Varies | Linear | Default: 0 for all Modules |
| E0h | FW_PRI_VERSION | - | BR | 8 | ASCII | N/A |
| E1h | FW_SEC_VERSION | - | BR | 8 | ASCII | N/A |
| F1h | ISP_UNLOCK_CODE | - | BR/W | 4 | ASCII | 00h,00h,00h,00h |
| F2h | ISP_CTRL_CMD | - | W | 1 | B | N/A |
| F3h | ISP_STATUS_BYTE | - | R | 1 | B | Varies |
| F4h | ISP_FLASH_ADDR | - | B | 4 | Raw Hex | Varies |
| F5h | ISP_FLASH_DATA | - | BR/W | 4 | Raw Hex | Varies |

Application Notes

Output Ripple and Noise Measurement

The setup outlined in the diagram below has been used for output voltage ripple and noise measurements on the μMP Series. When measuring output ripple and noise, a scope jack in parallel with a 0.1uF ceramic chip capacitor, and a 10uF aluminum electrolytic capacitor should be used. Oscilloscope should be set to 20MHz bandwidth for this measurement.

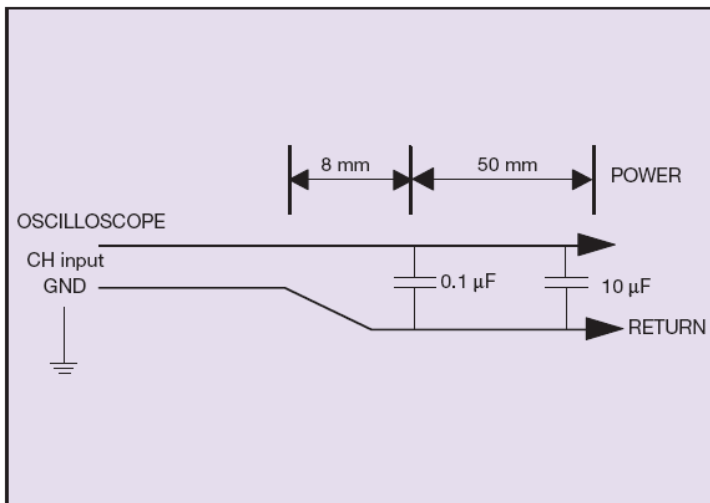

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333

ARTESYN[™]
 EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
 © 2014 All rights reserved.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com

Record of Revision and Changes

| Issue | Date | Description | Originators |
|-------|------------|--|-------------|
| 1.0 | 07.04.2015 | First Issue | K. Wang |
| 1.1 | 08.28.2015 | EN0 internal pull-up resister and Vintoe's comment | K. Wang |
| 1.2 | 09.02.2015 | Global inhibit description update, Richard Frost's comment | K. Wang |
| 1.3 | 11.17.2015 | Update 3.3V OVP mode | K. Wang |
| 1.4 | 04.28.2016 | Add uMP 04/10 performance curve | X. Sun |

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
 © 2014 All rights reserved.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com

FORTEC

ELEKTRONIK AG

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

FORTEC Elektronik AG

Hauptniederlassung
Lechwiesenstr. 9
86899 Landsberg am Lech

Telefon: +49 (0) 8191 91172-0
Telefax: +49 (0) 8191 21770
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

FORTEC Elektronik AG

Büro Nord
Am Hasenkamp 36
22457 Hamburg

Telefon: +49 (0) 40 54 80 56 11
Telefax: +49 (0) 40 54 80 56 13
E-Mail: nord@fortecag.de
Internet: www.fortecag.de

FORTEC Elektronik AG

Büro West
Hohenstaufenring 55
50674 Köln

Telefon: +49 (0) 221 272 273-0
Telefax: +49 (0) 221 272 273-10
E-Mail: west@fortecag.de
Internet: www.fortecag.de

FORTEC Elektronik AG

Büro Wien
Nuschinggasse 12
A-1230 Wien

Telefon: +43 1 8673492-0
Telefax: +43 1 8673492-26
E-Mail: office@fortec.at
Internet: www.fortec.at

ALTRAC AG

(Tochter der Fortec AG):
Bahnhofstraße 3
CH-5436 Würenlos

Telefon: +41 (0) 44 7446111
Telefax: +41 (0) 44 7446161
E-Mail: info@altrac.ch
Internet: www.altrac.ch

Members of the FORTEC Group:

